

Extra Equipment


Points

While the standard 200 mm point covers most applications, a narrower 120 mm version and a wider 350 mm version are also available. By simply changing the point size, the Combi-Tiller can be adapted for different soil types and working depths.



LED Lighting

LED lighting is available for all Combi-Tiller models.

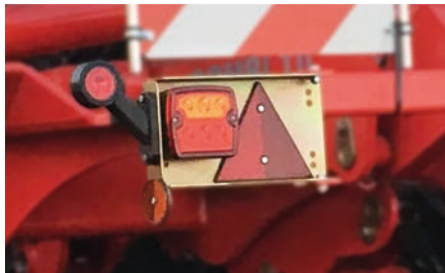

Warning Boards

Optional mounting on light brackets.




Square Tube Roller


A detachable square tube roller is available for the Combi-Tiller PTO to improve depth control.




Technical Specifications




3,00 - 6,00 m



890 - 2.385 kg



125 - 300 hp



5 - 12 pcs.

| Working Width, m | Model | Stone Protection | Number of Tines | Tine Spacing, cm | Power Requirement, hp | Weight, kg |
|------------------|-------|--------------------|-----------------|------------------|-----------------------|------------|
| 2.50 | Rigid | Shear Bolt | 4 | 57.5 | 100 | 560 |
| 2.50 | Rigid | Hydr. Auto Release | 4 | 57.5 | 100 | 690 |
| 3.00 | Rigid | Shear Bolt | 4 | 75.0 | 100 | 620 |
| 3.00 | Rigid | Hydr. Auto Release | 4 | 75.0 | 100 | 750 |
| 3.00 | Rigid | Shear Bolt | 6 | 50.0 | 150 | 690 |
| 3.00 | Rigid | Hydr. Auto Release | 6 | 50.0 | 150 | 820 |
| 3.50 | Rigid | Shear Bolt | 6 | 58.3 | 150 | 760 |
| 3.50 | Rigid | Hydr. Auto Release | 6 | 58.3 | 150 | 930 |
| 4.00 | Rigid | Shear Bolt | 6 | 66.6 | 150 | 820 |
| 4.00 | Rigid | Hydr. Auto Release | 6 | 66.6 | 150 | 990 |
| 4.00 | Rigid | Shear Bolt | 8 | 50.0 | 200 | 890 |
| 4.00 | Rigid | Hydr. Auto Release | 8 | 50.0 | 200 | 1,080 |

Combi-Tiller PTO

Strength and Flexibility



Tel.: +45 97 72 42 88
E-mail: info@he-va.com

Web: www.he-va.com

N.A. Christensensvej 34
DK-7900 Nykøbing Mors

Your HE-VA dealer



HE-VA reserves the right to make design and construction changes without notice




Combi-Tiller PTO

The Combi-Tiller series has been developed to operate both as stand-alone machines and in combination with a following implement.

The Combi-Tiller PTO is based on the original Combi-Tiller MKI, but the frame has been designed to allow the passage of a PTO shaft.

This makes it possible, for example, to use a rotary harrow.

Short and Compact

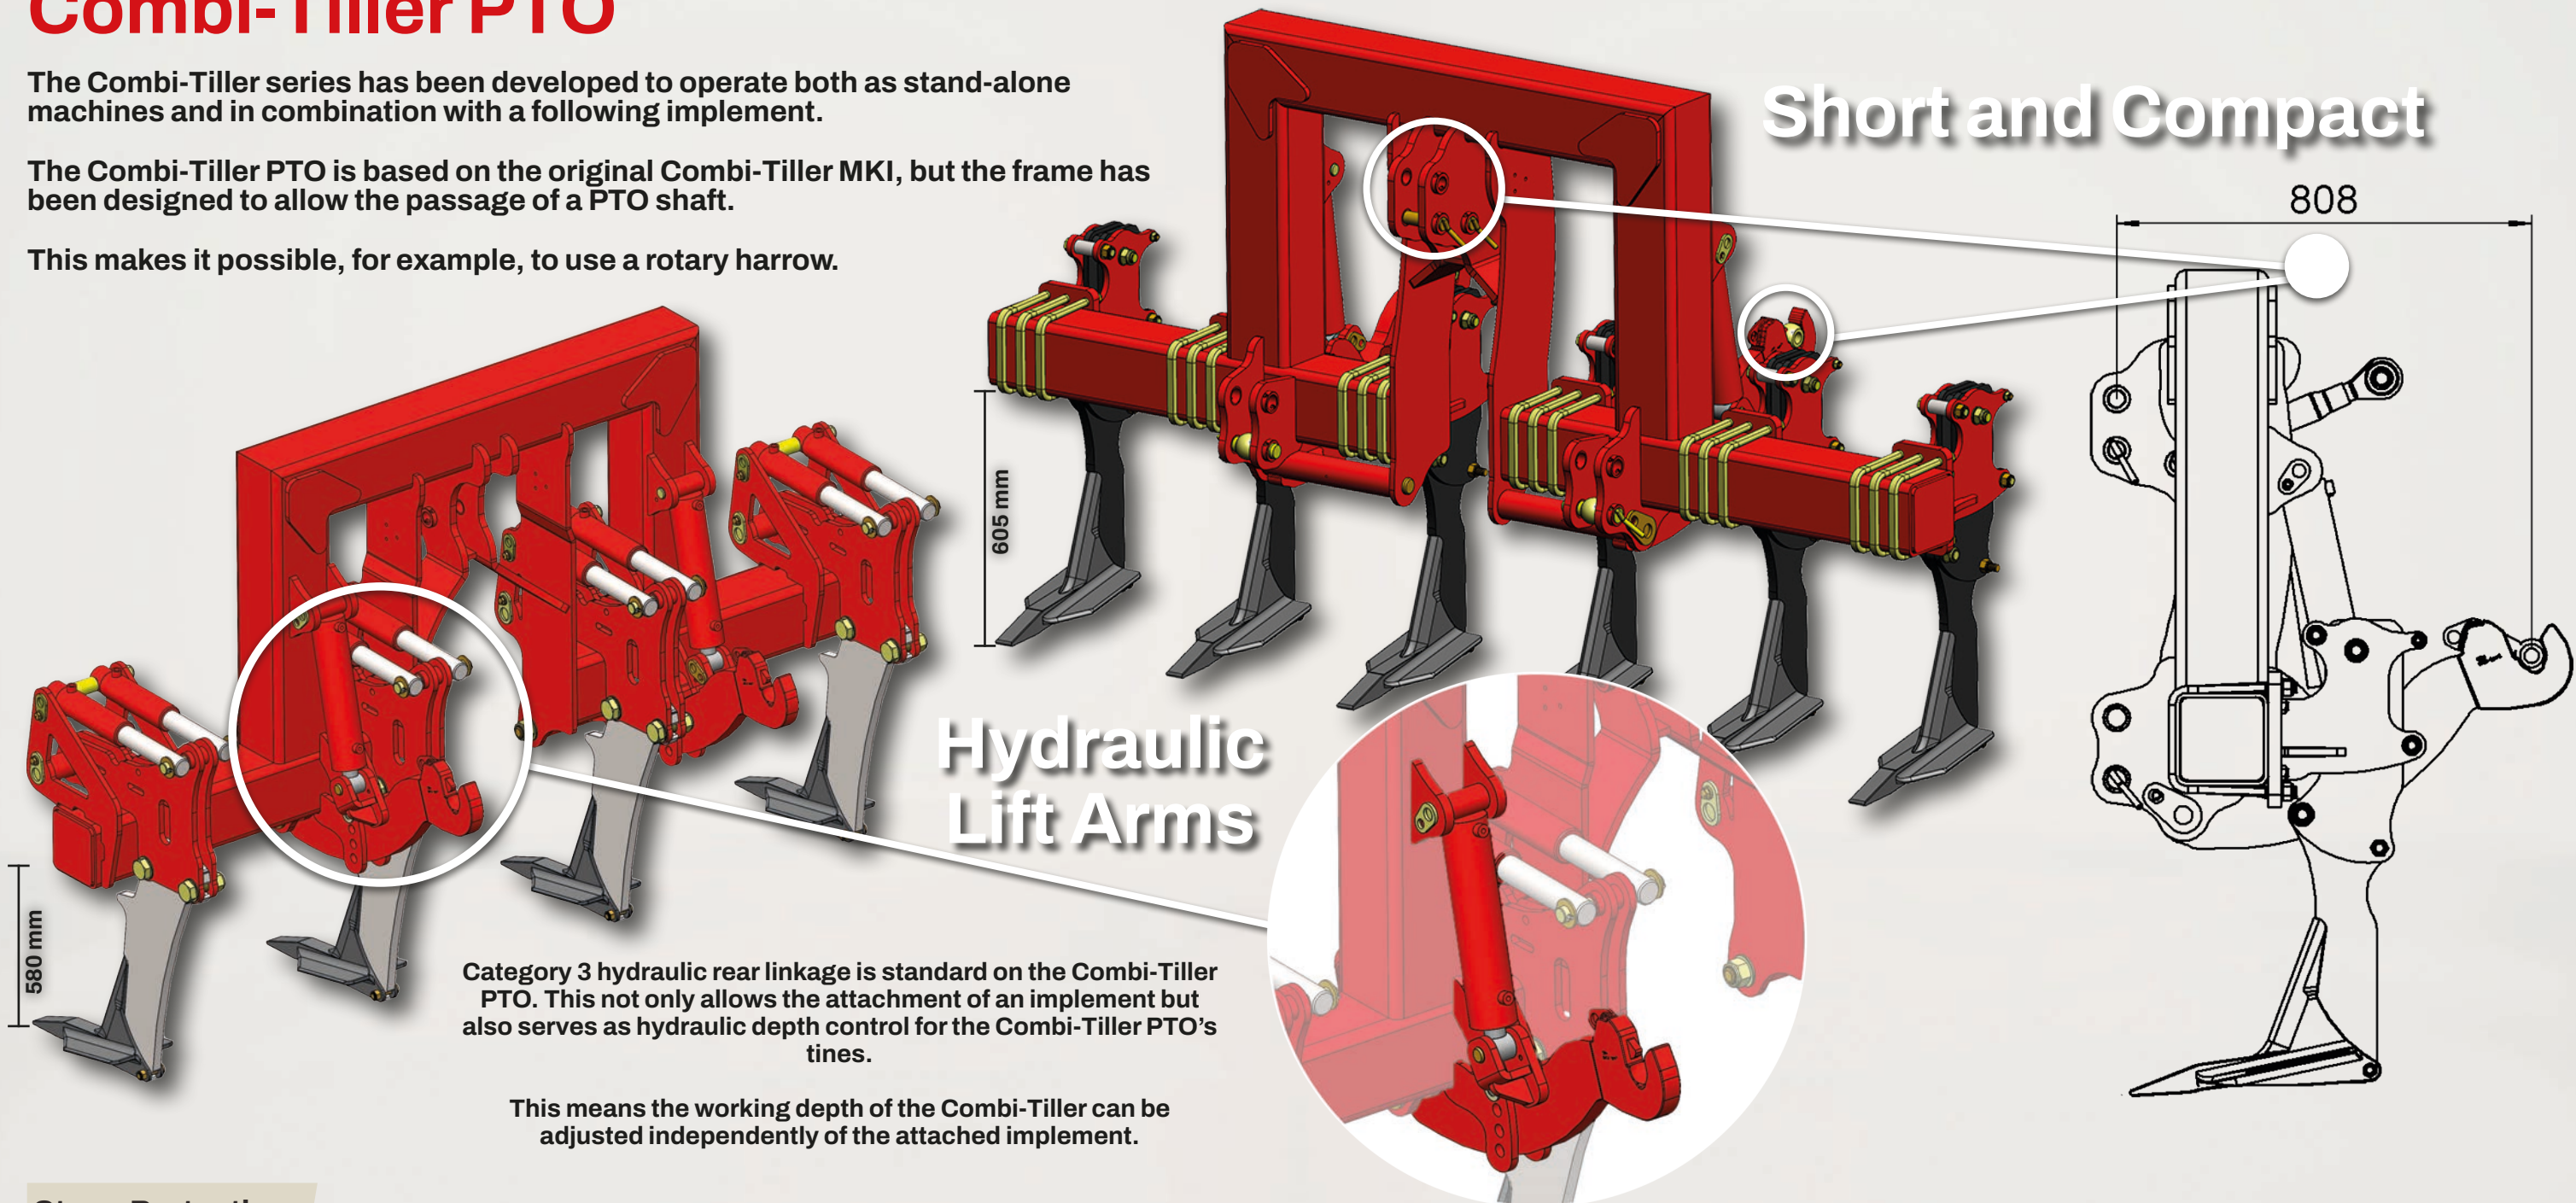

Category 3 hydraulic rear linkage is standard on the Combi-Tiller PTO. This not only allows the attachment of an implement but also serves as hydraulic depth control for the Combi-Tiller PTO's tines.

This means the working depth of the Combi-Tiller can be adjusted independently of the attached implement.

Stone Protection

Shear Bolt
The Combi-Tiller PTO is protected against overload via shear bolts mounted on each individual tine.

The diagram shows a red hydraulic arm with a grey tine. A circular inset shows a shear bolt. An arrow indicates the tine's movement from a vertical working position to a horizontal retracted position when the shear bolt fails.

Hydraulic Stone Protection
With hydraulic stone protection, the tine automatically returns to its working position after being released when hitting a stone.

The diagram shows a red hydraulic arm with a grey tine. An arrow indicates the tine's movement from a horizontal retracted position back to a vertical working position.

Standard Points

A standard Combi-Tiller point is 200 mm wide and mounted on a 25 mm wide tine.

The point itself is made of cast steel, which is hardened to resist wear without becoming brittle.

A single bolt, located behind the support leg's heel, holds the point in place and allows for quick replacement.

