


Extra Equipment - Lift-Roller

Stone box set




Grass-Seeder Kit

Consists of longfinger harrow in front of the rings, Ø230 mm plain roller behind the implement and mounting set for Multi-Seeder.

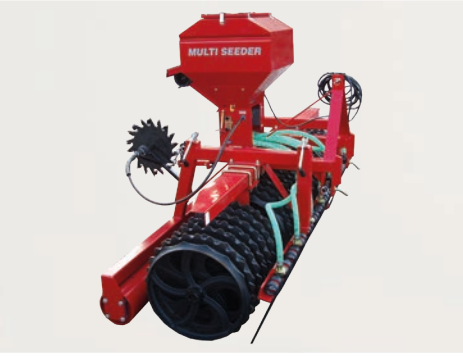

LED Lights

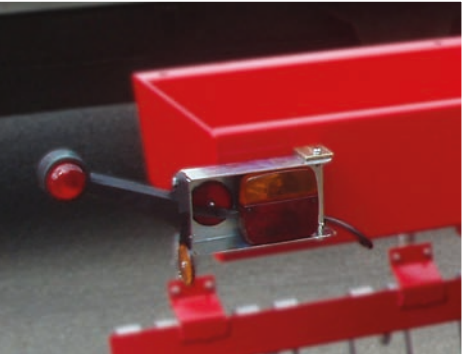

Warning Boards

Detachable warning boards for safer driving.



Extra Equipment - Vip-Roller


Stone box set



LED Lights



Hydraulic / Air brakes

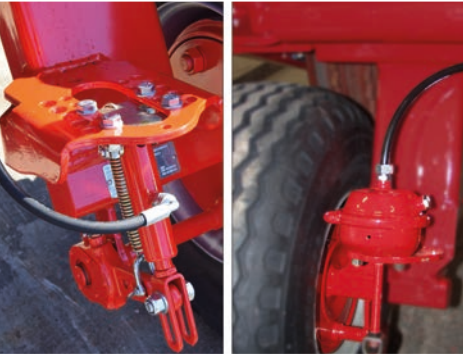

Wheel track eradicator



Technical Specifications

Lift-Roller

Lift-Roller

2.60 - 3.00 m










2.60 - 3.00 m

30 - 60 hp

680 - 1,430 kg

		Cambridge				Star ring		Cam	Crosskill			2D Corrugated		
Working Width, m	Ring size	510 mm	510 mm	560 mm	620 mm	450/500 mm	550/600 mm	550 mm	485/530 mm	550/600 mm	500 mm	550 mm	600 mm	
	Spokes	3	8	9	10	-	-	-	-	-	8	9	10	
	Weight, kg	930	1,101	1,160	1,250	980	1,230	680	730	1,050	830	860	880	
	Rings, pcs.	45	45	45	45	42	42	16	25	25	31	31	31	
	Axle, mm	60	60	60	60	60	60	60	60	60	60	60	60	
3.00 Transport w. 3.00	Weight, kg	1,060	1,261	1,320	1,430	1,110	1,400	820	830	1,170	920	960	990	
	Rings, pcs.	53	53	53	53	50	50	19	27	27	35	35	35	
	Axle, mm	60	60	60	60	60	60	60	60	60	60	60	60	

Vip-Roller

Vip-Roller																
		3.30 - 8.20 m			2.45 - 3.32 m			40 - 140 hp			1,090 - 3,980 kg					
		Cambridge			Star ring			Cam			Crosskill			2D Corrugated		
																
Working Width, m	RING SIZE	510 mm	510 mm	560 mm	450/500 mm			550 mm			485/530 mm			500 mm	550 mm	
	SPOKES	3	8	9	-			-			-			8	9	
	WEIGHT, KG	1,500	1,739	1,830	1,520			1,090			1,430			1,470	1,730	
	RINGS, PCS.	63	63	63	60			22			33			41	41	
3.30	TRANSPORT W. 2.32	AXLE, MM	60	60	60	60	60	60	60	60	60	60	60	60	60	
3.70	TRANSPORT W. 2.32	WEIGHT, KG	1,640	1,910	2,000	1,670			1,150			1,570			1,610	1,900
		RINGS, PCS.	71	71	71	68			25			37			46	46
		AXLE, MM	60	60	60	60	60	60	60	60	60	60	60	60	60	
4.10	TRANSPORT W. 2.32	WEIGHT, KG	1,870	2,170	2,260	1,890			1,330			1,780			1,830	2,160
		RINGS, PCS.	79	79	79	76			28			41			51	51
		AXLE, MM	60	60	60	60	60	60	60	60	60	60	60	60	60	
4.50	TRANSPORT W. 2.32	WEIGHT, KG	2,020	2,190	2,450	2,050			1,420			1,890			1,910	2,140
		RINGS, PCS.	87	87	87	84			30			45			57	57
		AXLE, MM	60	60	60	60	60	60	60	60	60	60	60	60	60	
WHEELS: 10.0 / 80 X 12 - 10 PLY																
5.40	TRANSPORT W. 2.45	WEIGHT, KG	2,450	2,600	3,020	2,520			1,790			2,300			2,340	2,880
		RINGS, PCS.	105	105	105	98			36			54			69	69
		AXLE, MM	60	60	60	60	60	60	60	60	60	60	60	60	60	
6.30	TRANSPORT W. 2.45	WEIGHT, KG	2,830	3,040	3,810	2,890			2,000			2,670			2,730	3,140
		RINGS, PCS.	123	123	123	120			42			63			78	78
		AXLE, MM	60	60	60	60	60	60	60	60	60	60	60	60	60	
WHEELS: 10.0 / 75 X 15.3 - 10 PLY																
7.30	TRANSPORT W. 2.45	WEIGHT, KG	3,490	3,720	4,190	3,590			2,520			3,300			3,380	3,750
		RINGS, PCS.	143	143	143	140			48			73			90	90
		AXLE, MM	60	60	60	60	60	60	60	60	60	60	60	60	60	
7.60	TRANSPORT W. 2.45	WEIGHT, KG	3,614	3,874	4,368	3,730			2,588			3,370			3,490	3,872
		RINGS, PCS.	151	151	151	148			45			79			99	99
		AXLE, MM	60	60	60	60	60	60	60	60	60	60	60	60	60	
8.20	TRANSPORT W. 2.45	WEIGHT, KG	3,790	3,980	-	3,820			2,790			3,610			3,690	-
		RINGS, PCS.	161	161	-	152			55			81			102	-
		AXLE, MM	60	60	-	60			60			60			60	-
WHEELS: 11.5 / 80 X 15.3 - 14 PLY																



Lift- & Vip-Roller

Simple, effective and just right!



Tel.: +45 97 72 42 88
E-mail: info@he-va.com

Web: www.he-va.com

N.A. Christensensvej 34
DK-7900 Nykøbing Mors

Your HE-VA dealer

HE-VA reserves the right to make design and construction changes without notice



Lift-Roller

Easy to lift

The Lift-Roller is simple to operate, even for unskilled operators and has its own in-built stand which flicks into place for storage.




Simple Design

The Lift-Roller gives you a quick, easy solution to moisture retention and/or protection against slugs.

Free Movement on the Drawbar

HE-VA always maintains that simple ideas prove the most effective solutions. The bottom link arms carry a connecting bar, which has free movement enabling the Lift-Roller to follow field contours eliminating any possibility of strain on the frame.

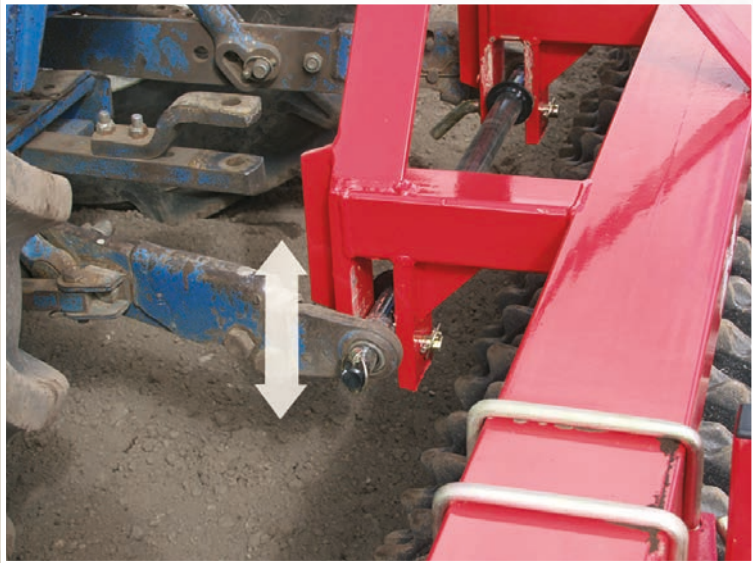

The LIFT Finish

The Lift-Roller is designed so the gap left by the bearing is covered by the tractor wheeling for full width, even consolidation.



Ring Options

Cambridge rings

510, 560 & 620 mm - 3 / 8 / 9 / 10 spokes

The Cambridge ring is a universal ring consisting of alternately plain and breaker rings. This ring efficiently consolidates stones and the bended profile is gentle on germinated plants. This combination results in an optimal crushing and packing effect and the great mobility of the breaker ring makes it highly self cleaning.



AVAILABLE AS STEEL CAST

Star rings

450/500 mm & 550/600 mm

Often chosen, when the roller, besides doing the normal roller-jobs, is also used for soil packing and seedbed preparation. In light soil types, the surface is left slightly packed and uneven, which prevents drifting soil. In sticky soil types, the rings' self cleaning effect is of great importance. The Star ring furthermore has a great draining effect on grass fields as the points make little holes in the field.



AVAILABLE AS STEEL CAST

Cam rings

550 mm

The Cam ring is most efficient in very light soil types like loose and sandy mould due to the fact that it divides the soil into fine particles and packs it, leaving a porous surface with little clods, which help prevent soil drifting.



Crosskill rings

485/530 mm & 550/600 mm

Crosskill rings are often used in light and medium-heavy soil types. The rings crush clods and leave the surface slightly crumbled, which prevents soil drifting. These rings are self cleaning, which only increases the effect of the rings.



2D Corrugated rings

500, 550 & 600 mm - 8 / 9 / 10 spokes

2D corrugated rings create a level surface completely free of stones, which is of great importance when seeding particular types of crop. It is often used for consolidating germinated seeds as the rounded design is gentle with the plants.



AVAILABLE AS STEEL CAST

Contour Flexing

The Vip-Roller wings are connected to the centre section so they can pivot under control to follow the contours of the field.



Simple Locking, Safe Transport

The Vip design supports the side section horizontally in a positive locking cradle, which is safe during transport and storage.



Drawbar Height Adjustment



The drawbar height is easily adjustable with a simple stop bolt.

Rings are mounted on 60mm axles for strength and long life. The axles run on 4 bolt bearings, protected inside the U profile steel.



Fast and Safe Folding



1



2



3



4



5



2,45 m
Max.

