



Grass-Tiller


The optimal subsoiler for
grassland with structural damage



Grass-Tiller - for effective subsoiling

Grass-Tiller is especially suitable for soil loosening in grass fields and for loosening up structural damages from heavy tractors etc.

This subsoiler has scalloped disc coulters in front of each tine, which cut up the grass effectively, before the tines loosen the soil in depth down to 50 cm. The accu discs ensure that the tines do not rip up the surface and the roller consolidates the soil afterwards.

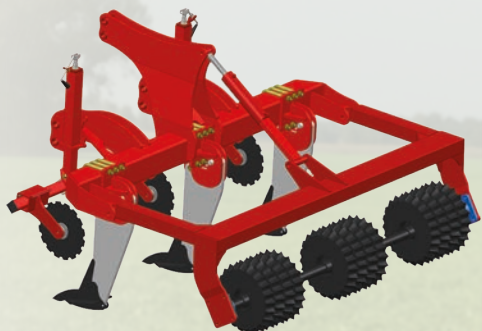

Grass-Tiller is available with both hydraulic and Quick-Push stone protection. A hydraulic stone protection is the best choice, when processing stony soil types. A cylinder on each tine enables the tines to automatically swing upwards, when hitting a stone and down afterwards.



For top soil and for smaller fields, the Quick-Push stone protection system is the obvious choice. Once the tine meets a stone, the shearbolt with 8 steps will be cut. The simple procedure of removing the R-clip and pushing the bolt into place again can be done completely without the use of tools and you will quickly be on your way again.

Technical Specifications



1.80 - 3.50 m



1,280 - 2,590 kg



80 - 200 hp



2 - 5 pcs.

Working Width, m	Stone Protection	Number of Tines	Standard Tine Distance, cm	Max. Tine Dist. between outer Tines, cm	Power Req., hp	Weight, kg		
						Square Tube Roller	Star Roller (synchrone)	Star Roller (Full)
1.50	Quick-Push	2	100	100	60 - 100	-	-	-
1.50	Quick-Push	3	50	100	90 - 120	-	-	-
1.50	Hydraulic	2	100	100	60 - 100	-	-	-
1.50	Hydraulic	3	50	100	90 - 120	-	-	-
1.80	Quick-Push	2	120	130	60 - 100	-	-	-
1.80	Quick-Push	3	60	130	90 - 120	-	-	-
1.80	Hydraulic	2	120	130	60 - 100	-	-	-
1.80	Hydraulic	3	60	130	90 - 120	-	-	-
2.50	Quick-Push	3	90	200	90 - 120	1,280	1,435	1,850
2.50	Hydraulic	3	90	200	90 - 120	1,330	1,485	1,900
3.00	Quick-Push	3	100	250	90 - 120	1,350	1,475	2,060
3.00	Quick-Push	4	75	250	110 - 160	1,435	1,680	2,135
3.00	Hydraulic	3	100	250	90 - 120	1,440	1,565	2,150
3.00	Hydraulic	4	75	250	110 - 160	1,575	1,820	2,285
3.50	Quick-Push	5	70	300	130 - 200	1,630	1,960	2,470
3.50	Hydraulic	5	70	300	130 - 200	1,750	2,080	2,590



Tel.: +45 97 72 42 88
E-mail: info@he-va.com

Web: www.he-va.com

N.A. Christensensvej 34
DK-7900 Nykøbing Mors

Your HE-VA dealer

HE-VA reserves the right to make design and construction changes without notice

