


FRONT-PAKKER



4.00 m with 800 mm rings,
hydraulic folding and Spring-Board.

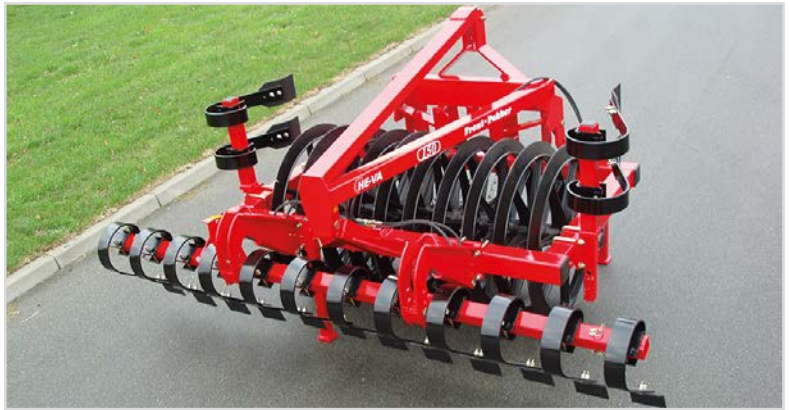

1.50 m with 4.00 m Spring-Board
in transport position.

- Specially developed ring profile w/shoulders ensures uniform packing on varying soil types.
- Autonomous packer. The pull centre is situated in front of the rings - to ensure free mobility of the machine.
- Automatic centre position when the implement is lifted on the headland.
- Three-point linkage with cat. 2 pins and cat. 2 distance.

MACHINES

| Work Width, m | Type | Ring Type | No. of Rings | Transport Width, m | Power Req., HP | Weight, kg | Item Number |
|---------------------|----------|----------------|------------------|--------------------|----------------|------------|-------------|
| FRONT-PAKKER | | | | | | | |
| 1.50 | Rigid | 700 mm | 10 | 1.70 | 15 | 622 | 67033-70 |
| 1.50 | Rigid | 800 mm | 10 | 1.75 | 15 | 782 | 67033-80 |
| 1.65 | Rigid | 900 mm | 10 | 1.80 | 15 | 920 | 67043-90 |
| 2.60 | Rigid | 700 mm | 16 | 2.60 | 20 | 867 | 67034-70 |
| 2.60 | Rigid | 800 mm | 16 | 2.60 | 20 | 1,123 | 67034-80 |
| 2.60 | Rigid | 900 mm | 14 | 2.60 | 20 | 1,443 | 67044-90 |
| 3.00 | Rigid | 700 mm | 18 | 3.00 | 25 | 953 | 67035-70 |
| 3.00 | Rigid | 800 mm | 18 | 3.00 | 25 | 1,241 | 67035-80 |
| 3.00 | Rigid | 900 mm | 17 | 3.00 | 25 | 1,602 | 67045-90 |
| 3.00 | Rigid | 700/800/700 mm | 18 | 3.00 | 25 | 1,113 | 67235-70 |
| 3.00 | Rigid | 800/900/800 mm | 17 | 3.00 | 25 | 1,441 | 67235-80 |
| 3.50 | Rigid | 700 mm | 22 | 3.50 | 30 | 1,079 | 67037-70 |
| 3.50 | Rigid | 800 mm | 22 | 3.50 | 30 | 1,415 | 67037-80 |
| 3.50 | Rigid | 900 mm | 19 | 3.50 | 30 | 1,835 | 67037-90 |
| 3.50 | Rigid | 700/800/700 mm | 22 | 3.50 | 30 | 1,255 | 67238-70 |
| 3.50 | Rigid | 800/900/800 mm | 19 | 3.50 | 30 | 1,635 | 67238-80 |
| 4.00 | Rigid | 700 mm | 24 | 4.15 | 35 | 1,247 | 67036-70 |
| 4.00 | Rigid | 800 mm | 24 | 4.15 | 35 | 1,631 | 67036-80 |
| 4.00 | Rigid | 900 mm | 23 | 4.15 | 35 | 2,111 | 67046-90 |
| 4.00 | Rigid | 700/800/700 mm | 24 | 4.15 | 35 | 1,607 | 67236-70 |
| 4.00 | Rigid | 800/900/800 mm | 23 | 4.15 | 35 | 1,831 | 67236-80 |
| 4.00 | Foldable | 700 mm | ^{1*} 24 | 2.55 | 35 | 1,370 | 67046-70 |
| 4.00 | Foldable | 800 mm | ^{1*} 24 | 2.65 | 35 | 1,754 | 67046-80 |
| 4.00 | Foldable | 900 mm | ^{1*} 21 | 2.75 | 35 | 2,234 | 67047-90 |
| 4.00 | Foldable | 700/800/700 mm | ^{1*} 24 | 2.55 | 35 | 1,530 | 67246-70 |
| 4.00 | Foldable | 800/900/800 mm | ^{1*} 21 | 2.65 | 35 | 1,954 | 67246-80 |
| 4.50 | Foldable | 700 mm | ^{1*} 26 | 2.55 | 40 | 1,466 | 67051-70 |
| 4.50 | Foldable | 800 mm | ^{1*} 26 | 2.65 | 40 | 1,882 | 67051-80 |
| 4.50 | Foldable | 900 mm | ^{1*} 23 | 2.75 | 40 | 2,402 | 67051-90 |
| 4.50 | Foldable | 700/800/700 mm | ^{1*} 26 | 2.55 | 40 | 1,626 | 67251-70 |
| 4.50 | Foldable | 800/900/800 mm | ^{1*} 23 | 2.65 | 40 | 2,082 | 67251-80 |
| 5.00 | Foldable | 700 mm | ^{1*} 30 | 2.85 | 45 | 1,814 | 67048-70 |
| 5.00 | Foldable | 800 mm | ^{1*} 30 | 2.95 | 45 | 2,294 | 67048-80 |
| 5.00 | Foldable | 700/800/700 mm | ^{1*} 30 | 2.85 | 45 | 2,006 | 67248-70 |
| 6.00 | Foldable | 700 mm | ^{1*} 36 | 2.85 | 55 | 2,083 | 67047-70 |
| 6.00 | Foldable | 800 mm | ^{1*} 36 | 2.95 | 55 | 2,659 | 67047-80 |
| 6.00 | Foldable | 700/800/700 mm | ^{1*} 36 | 2.95 | 55 | 2,275 | 67247-70 |

^{1*}Requires 1 double-acting oil outlet

MACHINES (CONTINUED)

| Work Width, m | Type | Ring Type | No. of Rings | Transport Width, m | Power Req., HP | Weight, kg | Item Number |
|--------------------------|----------|------------|------------------|--------------------|----------------|------------|-------------|
| FRONT-PAKKER TWIN | | | | | | | |
| 1.50 | Rigid | 700-700 mm | 15 | 1.70 | 15 | 975 | 67033-75 |
| 1.50 | Rigid | 800-800 mm | 15 | 1.75 | 20 | 1,185 | 67033-85 |
| 1.65 | Rigid | 900-900 mm | 13 | 1.80 | 20 | 1,590 | 67043-95 |
| 2.60 | Rigid | 700-700 mm | 21 | 2.60 | 20 | 1,380 | 67034-75 |
| 2.60 | Rigid | 800-800 mm | 21 | 2.60 | 25 | 1,740 | 67034-85 |
| 3.00 | Rigid | 700-700 mm | 24 | 3.00 | 25 | 1,570 | 67035-75 |
| 3.00 | Rigid | 800-800 mm | 24 | 3.00 | 30 | 2,010 | 67035-85 |
| 3.50 | Rigid | 700-700 mm | 30 | 3.50 | 35 | 1,610 | 67039-75 |
| 3.50 | Rigid | 800-800 mm | 30 | 3.50 | 40 | 2,290 | 67039-85 |
| 3.50 | Foldable | 700-700 mm | ^{1*} 29 | 2.55 | 35 | 1,780 | 67049-75 |
| 3.50 | Foldable | 800-800 mm | ^{1*} 29 | 2.65 | 40 | 2,460 | 67049-85 |
| 4.00 | Rigid | 700-700 mm | 34 | 4.15 | 40 | 1,890 | 67036-75 |
| 4.00 | Rigid | 800-800 mm | 34 | 4.15 | 45 | 2,665 | 67036-85 |
| 4.00 | Foldable | 700-700 mm | ^{1*} 32 | 2.55 | 40 | 2,070 | 67046-75 |
| 4.00 | Foldable | 800-800 mm | ^{1*} 32 | 2.65 | 45 | 2,845 | 67046-85 |

^{1*}Requires 1 double-acting oil outlet



1.50 m Front-Pakker Twin with Ø800 mm.

STANDARD EQUIPMENT

- Cleaning chains between the rings.
- Packer rings with wide shoulders – unique HE-VA feature.
- Support stand, pins and locking pins.



3.00 m with 800/900/800 mm rings.

EXTRA EQUIPMENT

- 2.60 m, 3.00 m, 3.50 and 4.00 m Front-Harrow or Spring-Board can also be mounted on 1.50/1.65 m models.
- Spring-Board is w/mech. adjustment of the height of the tine row and hydr. adjustment of the preparation degree.
- Transverse locking syst. w/possible individual connection and discon., very easy without use of any tools.
- Stabilization device: is recommended for combination with GPS auto steer.

| Description | Weight, kg | Item Number |
|---|------------|-------------|
| LED marking lights with clear and red glass, rigid models | 4 | 67033-01 |
| LED marking lights on mounting bar with clear and red glass, 4.00 m hydr. model | 14 | 67033-02 |
| LED marking lights on mounting bar with clear and red glass, 4,50 + 6.00 m hydr. | 17 | 67033-03 |
| Set of reflective warning boards (2 pieces) | 6 | 690160075 |
| Weight console set – for bolting on of additional weight, 2 pcs. (Front weight needs to be specified) | 32 | 67086-00 |
| Stabilization device for all models | 16 | 67086-10 |
| Mech. double change-over valve changes between Spring-Board and hydr. folding. | 5 | 67086-15 |
| Stone box set (2 pieces) | 32 | 630555009 |
| Double three-point linkage: hereby the Front-Roller can be mounted both front and rear on the tractor | - | 63040-02 |

EXTRA EQUIPMENT (CONTINUED)

| Work Width, m | Type | Description | Weight, kg | Item Number |
|--|----------|--|------------|-------------|
| 2-ROW FRONT HARROW – 12 X 45 MM TINES | | | | |
| 2.60 | Rigid | Front harrow with 15 tines, 2-row, with spindle depth control | 158 | 67080-50 |
| 3.00 | Rigid | Front harrow with 17 tines, 2-row, with spindle depth control | 177 | 67081-50 |
| 3.50 | Rigid | Front harrow with 20 tines, 2-row, with spindle depth control | 201 | 67083-50 |
| 4.00 | Rigid | Front harrow with 23 tines, 2-row, with spindle depth control | 254 | 67082-50 |
| 4.00 | Foldable | Front harrow with 23 tines, 2-row, with spindle depth control | 275 | 67087-50 |
| 4.50 | Foldable | Front harrow with 25 tines, 2-row, with spindle depth control | 398 | 67051-50 |
| 5.00 | Foldable | Front harrow with 29 tines, 2-row, with spindle depth control | 330 | 67091-50 |
| 6.00 | Foldable | Front harrow with 35 tines, 2-row, with spindle depth control | 397 | 67089-50 |
| - | - | Edge equipment set for 2-row front-harrow | 18 | 67058-00 |
| 3-ROW FRONT HARROW – 12 X 65 MM TINES | | | | |
| 2.60 | Rigid | Front harrow with 15 tines, 3-row, with spindle depth control | 183 | 67080-51 |
| 3.00 | Rigid | Front harrow with 17 tines, 3-row, with spindle depth control | 205 | 67081-51 |
| 3.50 | Rigid | Front harrow with 20 tines, 3-row, with spindle depth control | 234 | 67083-51 |
| 4.00 | Rigid | Front harrow with 23 tines, 3-row, with spindle depth control | 292 | 67082-51 |
| 4.00 | Foldable | Front harrow with 23 tines, 3-row, with spindle depth control | 314 | 67087-51 |
| 4.50 | Foldable | Front harrow with 25 tines, 3-row, with spindle depth control | 579 | 67051-51 |
| 5.00 | Foldable | Front harrow with 29 tines, 3-row, with spindle depth control | 378 | 67091-51 |
| 6.00 | Foldable | Front harrow with 35 tines, 3-row, with spindle depth control | 455 | 67089-51 |
| - | - | Edge equipment set for 3-row front-harrow | 32 | 67058-10 |
| - | - | Goose foot point 180x6 mm, only for 12x65 mm tines (Additional price per m) | 4 | 3401016 |



| Work Width, m | Type | Description | Weight, kg | Item Number |
|--|----------|---|----------------------|-------------|
| SPRING-BOARD – 10 X 80 MM TINES | | | | |
| 2.60 | Rigid | Spring-Board with hydraulic depth control, 10 tines | ^{1*} 185 | 67183-00 |
| 3.00 | Rigid | Spring-Board with hydraulic depth control, 12 tines for mounting on 1.50/1.65 m | ^{1*/2*} 240 | 67194-00 |
| 3.00 | Rigid | Spring-Board with hydraulic depth control, 12 tines | ^{1*} 232 | 67184-00 |
| 3.50 | Rigid | Spring-Board with hydraulic depth control, 14 tines | ^{1*} 255 | 67191-00 |
| 4.00 | Rigid | Spring-Board with hydraulic depth control, 16 tines for mounting on 1.50/1.65 m | ^{1*/2*} 268 | 67186-00 |
| 4.00 | Rigid | Spring-Board with hydraulic depth control, 16 tines | ^{1*} 260 | 67185-00 |
| 4.00 | Foldable | Spring-Board with hydraulic depth control, 16 tines | ^{1*/3*} 460 | 67188-00 |
| 4.50 | Foldable | Spring-Board with hydraulic depth control, 18 tines | ^{1*} 412 | 67193-00 |
| 5.00 | Foldable | Spring-Board with hydraulic depth control, 20 tines | ^{1*} 515 | 67192-00 |
| 6.00 | Foldable | Spring-Board with hydraulic depth control, 24 tines | ^{1*} 570 | 67190-00 |
| - | - | Edge equipment set for Spring-Board tines | 11 | 63301-00 |
| SPRING-BOARD WITH SLICING PLATES | | | | |
| 2.60 | Rigid | Spring-Board with hydraulic depth control, 10 tines | ^{1*} 185 | 67383-00 |
| 3.00 | Rigid | Spring-Board with hydraulic depth control, 12 tines for mounting on 1.50/1.65 m | ^{1*/2*} 235 | 67394-00 |
| 3.00 | Rigid | Spring-Board with hydraulic depth control, 12 tines | ^{1*} 232 | 67384-00 |
| 3.50 | Rigid | Spring-Board with hydraulic depth control, 14 tines | ^{1*} 262 | 67391-00 |
| 4.00 | Rigid | Spring-Board with hydraulic depth control, 16 tines for mounting on 1.50/1.65 m | ^{1*/2*} 268 | 67386-00 |
| 4.00 | Rigid | Spring-Board with hydraulic depth control, 16 tines | ^{1*} 260 | 67385-00 |
| 4.00 | Foldable | Spring-Board with hydraulic depth control, 16 tines | ^{1*/3*} 460 | 67388-00 |
| 4.50 | Foldable | Spring-Board with hydraulic depth control, 18 tines | ^{1*} 416 | 67393-00 |
| 5.00 | Foldable | Spring-Board with hydraulic depth control, 20 tines | ^{1*} 515 | 67392-00 |
| 6.00 | Foldable | Spring-Board with hydraulic depth control, 24 tines | ^{1*} 570 | 67390-00 |
| TRANSVERSE LOCKING SYSTEM - CONNECTS THE SPRING-BOARD TINES | | | | |
| 2.60 | Rigid | Complete set for Spring-Board | 30 | 67283-00 |
| 3.00 | Rigid | Complete set for Spring-Board | 35 | 67284-00 |
| 3.50 | Rigid | Complete set for Spring-Board | 41 | 67286-00 |
| 4.00 | Rigid | Complete set for Spring-Board | 47 | 67285-00 |
| 4.00 | Foldable | Complete set for Spring-Board | 51 | 67288-00 |
| 4.50 | Foldable | Complete set for Spring-Board | 53 | 67289-00 |
| 5.00 | Foldable | Complete set for Spring-Board | 55 | 67292-00 |
| 6.00 | Foldable | Complete set for Spring-Board | 71 | 67290-00 |

^{1*} Requires 1 additional double-acting oil outlet.

^{2*} Can manually be changed to transport width 1.85 and 2.85 m.

^{3*} Cannot be mounted on 1.50 / 1.65 m models.

PRESS-ROLLER



Press-Roller H760, 1.50 m.

- Large wheel diameter ensures proper operation on loose sandy soil.
- Three-point linkage with cat. 2 pins and cat. 2 distance.

MACHINES

| Work Width, m | Type | No. of Wheels | Transport Width, m | Power Req., HP | Weight, kg | Item Number |
|---------------|------------------------|---------------|--------------------|----------------|------------|-------------|
| 1.50 | Rigid | 4 | 1.70 | 20 | 470 | 67072-00 |
| 4.00 | Rigid | 1+4+1 | 4.15 | 35 | 705 | 67073-00 |
| 4.00 | Foldable ^{1*} | 1+4+1 | 2.65 | 35 | 795 | 67074-00 |

^{1*}Requires 1 double-acting oil outlet

STANDARD EQUIPMENT

- Triple-sealed ball bearings and 60 mm shaft.
- Rubber wheels, 10.0/75 x 15.3 – 10 PLY, 760 mm wheel diameter.
- Scrapers between and behind wheels.
- Support stand, pins and locking pins.

EXTRA EQUIPMENT

| Description | Weight, kg | Item Number |
|---|------------|-------------|
| LED marking lights with clear and red glass, rigid models | 4 | 67033-01 |
| LED marking lights with clear and red glass, 4.00m hydr. model | 14 | 67033-02 |
| LED marking lights with clear and red glass, 5.00 + 6.00m hydr. | 17 | 67033-03 |
| Set of reflective warning boards (2 pieces) | 6 | 690160075 |
| Weight console set – for bolting on of additional weight, 2 pcs. (Front weight needs to be specified) | 32 | 67086-00 |
| Stabilization device for all models | 16 | 67086-10 |