



COMBI-TILLER PTO

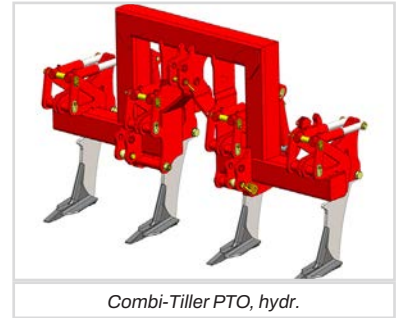

4.00 m Combi-Tiller PTO with 5 tines.

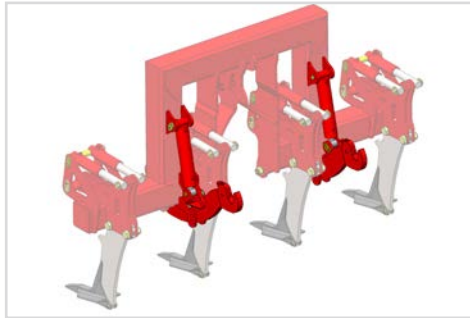

Combi-Tiller PTO, hydr.

- Hydraulic depth regulation.
- Solid frame construction, 180x180x8 mm sectional tubes.
- Max. weight of mounted machine after the Combi-Tiller PTO: 4 tonnes.
- Frame clearance: 580 – 605 mm.
- Max. working depth: 400 mm.
- Length from coupling point to coupling point (centre): 810 mm.
- Three-point linkage in front: cat. 3 pins and cat. 3 distance.
- Lift with cat. 3 snap-couplings and cat. 3 distance

MACHINES

COMBI-TILLER PTO WITH TUNNEL FOR THROUGH POWER TAKE-OFF SHAFT

Work Width, m	Stone Protection	No. of Tines	Row Spacing, cm	Power Req., HP	Weight, kg	Item Number
2.50	Shear bolt	4	57.5	100	560	64514-30
2.50	Hydraulic auto release	4	57.5	100	690	64514-31
3.00	Shear bolt	4	75.0	100	620	64514-32
3.00	Hydraulic auto release	4	75.0	100	750	64514-33
3.00	Shear bolt	6	50.0	150	690	64514-34
3.00	Hydraulic auto release	6	50.0	150	820	64514-35
3.50	Shear bolt	6	58.3	150	760	64514-36
3.50	Hydraulic auto release	6	58.3	150	930	64514-37
4.00	Shear bolt	6	66.6	150	820	64514-38
4.00	Hydraulic auto release	6	66.6	150	990	64514-39
4.00	Shear bolt	8	50.0	200	890	64514-40
4.00	Hydraulic auto release	8	50.0	200	1,080	64514-41

STANDARD EQUIPMENT

- Pins and locking pins.
- Supporting leg.
- Point with 200 mm wing shares mounted with 25 wide tine.
- Top link.

EXTRA EQUIPMENT

Description	Item Number
LED lights with wire and socket	64509-01
Set of reflective warning boards (2 pieces)	67055-74
Square Tube Roller incl. frame - for retrofitting on 2.50 m Combi-Tiller PTO	64514-50
Square Tube Roller incl. frame - for retrofitting on 3.00 m Combi-Tiller PTO	64514-51
Square Tube Roller incl. frame - for retrofitting on 3.50 m Combi-Tiller PTO	64514-52
Square Tube Roller incl. frame - for retrofitting on 4.00 m Combi-Tiller PTO	64514-53
Point with 120 mm wing shares (Price reduction per tine)	645000043A
Points 120 mm with hard metal plate (Additional price per tine)	645000043TA
Point with 350 mm wing shares (Additional price per tine)	645000063A
Points 200 mm with hard metal plate (Additional price per tine)	645000044TA
Points with 120 mm wing shares, Longlife, with hard metal (Additional price per tine)	645000043HDA
Points with 200 mm wing shares, Longlife, with hard metal (Additional price per tine)	645000044HDA
Points with 350 mm wing shares, Longlife, with hard metal (Additional price per tine)	645000063HDA
Easy-Draft kit. 15 mm tine w/120 mm wear point w/hard metal plate. Max working depth: 300 mm (Additional price per tine)	64511-15
Easy-Draft kit. 15 mm tine w/120 mm wear point w/hard metal plate. Max working depth: 300 mm (Retrofitting per tine)	64511-18
120 mm wear point for Easy-Draft, with hard metal plate in center + wings (Additional price per tine)	645000056TA
200 mm wear point for Easy-Draft, with hard metal plate in center (Additional price per tine)	645000054A
200 mm wear point for Easy-Draft, with hard metal plate in center + wings (Additional price per tine)	645000054TA
120 mm welded wear point for Easy-Draft (Additional price per tine)	645000056SA
Tine reinforcement, hard metal 60x25x15 mm incl. factory fitting on new tine. Recommended when tilling > 350 mm. Omittable for item numbers 645000044T / 645000043T. (Additional price per tine)	645000085
Tine reinforcement, hard metal 60x15x15 mm incl. factory-mounting on new tine. Only applied for Easy-Draft (Additional price per tine)	645000083