

Extra Equipment


Slicing Plates

Cuts and breaks the soil and clods much more effectively than the standard points on the Spring-Board. Used for heavier soil types.



Transv. Lock. System

The levelling effect of the Spring-Board is increased by locking the tines together, making it one complete "board". Easy to mount / dismount tine by tine.

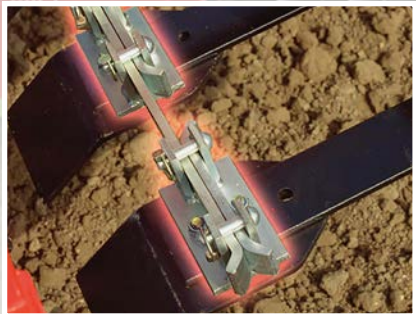


Edge Equipment

To ensure that the soil is retained within the working width, edge equipment can be mounted on all Spring-Boards and Front-Harrows.



Easy-Change

Easy-Change kit for quick change between normal plate on Spring-Board and crust breaker tip. Mounting on standard tine.

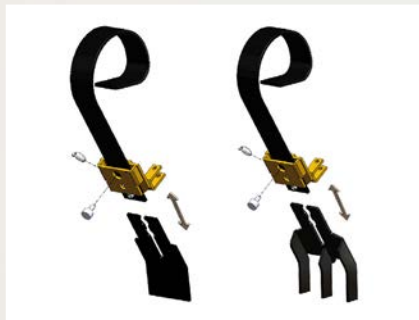

Stabilization Device

Recommended for use with tractors with GPS. For working widths from 5 m.



Spring-Board

Hydraulic adjustment of the working depth, so the aggressiveness can be adjusted on the move or the Spring-Board can be lifted completely if the conditions dictate. The angle of work is set according to soil conditions on a numbered gauge.



Front-Harrow

An optional 2- or 3-row front tine section is also available. It is ideally suited for breaking up and crumbling the soil ahead of the roller. Depth adjustment is carried out easily and conveniently using screw spindles.



Top-Cutter

Effectively cuts stumps and crop residues without damaging the roots, thus contributing a great degree of flexibility to the process of creating a false seedbed after harvest.



Working Width, m	Type	Front-Harrow		Spring-Board		Transverse Locking System, kg	Double Frame, kg	Top-Cutter	
		Number of Tines	Weight, kg	Number of Tines	Weight, kg			Diameter incl. knife, mm	Weight, kg
2.60	Rigid	15	158 - 183	10	185	30	42	Ø390	350
3.00	Rigid	17	177 - 205	12	205	35	42	Ø390	370
3.00	Foldable	17	185 - 213	12	245	39	-	Ø390	395
3.50	Rigid	20	215 - 234	14	235	41	42	Ø390	400
4.00	Rigid	23	254 - 292	16	260	47	78	Ø390	460
4.00	Foldable	23	275 - 314	16	460	51	-	Ø390	635
4.50	Foldable	25	436 - 617	18	402	53	-	Ø390	690
5.00	Foldable	29	330 - 378	20	515	55	-	Ø390	730
6.00	Foldable	35	397 - 455	24	570	71	-	Ø390	785

Technical Specifications



1.50 - 6.00 m



2.00 - 4.00 m



550 - 3,030 kg



15 - 50 HP

		Cambridge			Star Ring		TWIN Star		Crosskill		V-Profile		Cutter-Roller	
														
Working Width, m	RING SIZE	510 mm	560 mm	620 mm	450/500 mm	550/600 mm	450/450 mm	550/550 mm	485/530 mm	550/600 mm	600 mm	700 mm	595 mm	
	SPOKES	3	9	10	-	-	-	-	-	-	-	-	-	
1-SECTION RIGID MODELS														
1.50 TRANSPORT 2.00	WEIGHT, KG RINGS, PCS. AXLE, MM	620 29 60	750 29 60	820 29 60	640 28 60	790 28 60	560 17 60	650 17 60	550 15 60	740 15 60	570 12 60	550 10 60	-	
2.60 TRANSPORT 2.60	WEIGHT, KG RINGS, PCS. AXLE, MM	930 45 60	1,160 45 60	1,260 45 60	980 42 60	1,240 42 60	830 31 60	980 31 60	730 23 60	1,050 23 60	850 19 60	850 15 60	-	
3.00 TRANSPORT 3.00	WEIGHT, KG RINGS, PCS. AXLE, MM	1,100 53 60	1,330 53 60	1,450 53 60	1,110 50 60	1,410 50 60	820 35 60	1,000 35 60	830 27 60	1,170 27 60	1,020 23 60	920 18 60	-	
3.50 TRANSPORT 3.50	WEIGHT, KG RINGS, PCS. AXLE, MM	1,190 61 60	1,500 61 60	1,640 61 60	1,240 60 60	1,590 60 60	940 41 60	1,290 41 60	950 31 60	1,340 31 60	1,150 27 60	1,050 22 60	-	
4.00 TRANSPORT 4.00	WEIGHT, KG RINGS, PCS. AXLE, MM	1,510 69 60	1,880 69 60	2,040 69 60	1,560 68 60	1,970 68 60	1,210 47 60	1,450 47 60	1,210 37 60	1,680 37 60	1,390 30 60	1,320 24 60	-	
2-SECTION HYDRAULIC MODELS														
3.00 TRANSPORT 2.13	WEIGHT, KG RINGS, PCS. AXLE, MM	1,240 50 60	1,410 50 60	1,630 50 60	1,290 24 60	1,590 24 60	1,120 48 60	1,300 48 60	1,010 24 60	1,350 24 60	1,200 20 60	1,150 18 60	-	
3-SECTION HYDRAULIC MODELS														
4.00 TRANSPORT 2.60 - 2.75	WEIGHT, KG RINGS, PCS. AXLE, MM	1,660 67 60	2,020 67 60	2,180 67 60	1,710 70 60	2,120 70 60	1,520 43 60	1,760 43 60	1,360 37 60	1,830 37 60	1,540 28 60	1,470 24 60	-	
4.50 TRANSPORT 2.60 - 2.75	WEIGHT, KG RINGS, PCS. AXLE, MM	1,886 75 60	2,131 75 60	2,281 75 60	1,724 70 60	2,098 70 60	1,477 47 60	1,726 47 60	1,675 34 60	1,717 34 60	1,599 32 60	1,690 26 60	-	
5.00 TRANSPORT 2.85 - 3.00	WEIGHT, KG RINGS, PCS. AXLE, MM	1,960 95 60	2,440 95 60	-	2,060 90 60	2,570 90 60	1,780 59 60	1,780 59 60	1,590 47 60	2,180 47 60	1,810 38 60	1,820 30 60	-	
6.00 TRANSPORT 2.85 - 3.00	WEIGHT, KG RINGS, PCS. AXLE, MM	2,350 115 60	2,940 115 60	-	2,410 110 60	3,030 110 60	2,140 71 60	2,500 71 60	1,910 57 60	2,630 57 60	2,170 46 60	2,180 36 60	-	
FRONT-ROLLER COMPACT - AUTONOMOUS														
1.50 TRANSPORT 2.00	WEIGHT, KG RINGS, PCS. AXLE, MM	- 29 60	- 29 60	- 29 60	- 28 60	- 28 60	- 17 60	- 17 60	- 15 60	- 15 60	- 12 60	- - -	-	
2.60 TRANSPORT 2.60	WEIGHT, KG RINGS, PCS. AXLE, MM	- 45 60	- 45 60	- 45 60	- 42 60	- 42 60	- 31 60	- 31 60	- 23 60	- 23 60	- 19 60	- - -	-	
3.00 TRANSPORT 3.00	WEIGHT, KG RINGS, PCS. AXLE, MM	1,105 53 60	- 53 60	- 53 60	- 50 60	- 50 60	- 35 60	- 35 60	- 27 60	1,300 27 60	- 23 60	- - -	-	
3.50 TRANSPORT 3.50	WEIGHT, KG RINGS, PCS. AXLE, MM	1,275 61 60	- 61 60	- 61 60	- 60 60	- 60 60	- 41 60	- 41 60	- 31 60	1,500 31 60	- 27 60	- - -	-	
FRONT-ROLLER COMPACT - NON-AUTONOMOUS														
1.50 TRANSPORT 2.00	WEIGHT, KG RINGS, PCS. AXLE, MM	- 29 60	- 29 60	- 29 60	- 28 60	- 28 60	- 17 60	- 17 60	- 15 60	- 15 60	- 12 60	- - -	-	
2.60 TRANSPORT 2.60	WEIGHT, KG RINGS, PCS. AXLE, MM	- 45 60	- 45 60	- 45 60	- 42 60	- 42 60	- 31 60	- 31 60	- 23 60	- 23 60	- 19 60	- - -	-	
3.00 TRANSPORT 3.00	WEIGHT, KG RINGS, PCS. AXLE, MM	- 53 60	- 53 60	- 53 60	- 50 60	- 50 60	- 35 60	- 35 60	- 27 60	- 27 60	- 23 60	- - -	648 - 780	
3.50 TRANSPORT 3.50	WEIGHT, KG RINGS, PCS. AXLE, MM	- 61 60	- 61 60	- 61 60	- 60 60	- 60 60	- 41 60	- 41 60	- 31 60	- 31 60	- 27 60	- - -	853 - 1,066	



Front-Roller

Stay in Front



Tel.: +45 97 72 42 88
E-mail: info@he-va.com

Web: www.he-va.com

N.A. Christensensvej 34
DK-7900 Nykøbing Mors

Your HE-VA dealer



HE-VA reserves the right to make design and construction changes without notice



Front-Roller

Effective crushing & consolidation to create the ideal seedbed

Front-Roller provides an even consolidation over the entire width and is suitable for shredding the surface so the best conditions for the optimal seed bed are achieved.

Combined with a full width Spring-Board, better leveling and tillage is achieved and, at the same time, a significantly better soil compaction on the leveled and tilled ground. This results in fewer overpasses with large savings as a result.



Front-Roller shown with 620 mm Cambridge rings.

1-, 2-, 3-section models



The rigid Front-Roller models are available in 1.50, 2.60, 3.00, 3.50 and 4.00 m working widths.



Front-Roller with hydraulic folding is available in 4.00, 5.00 and 6.00 m working widths.




Front-Roller - 3.00 m - 2-section - Hydraulic



On all front equipment you get...

Cat. II three point linkage with integrated steering.

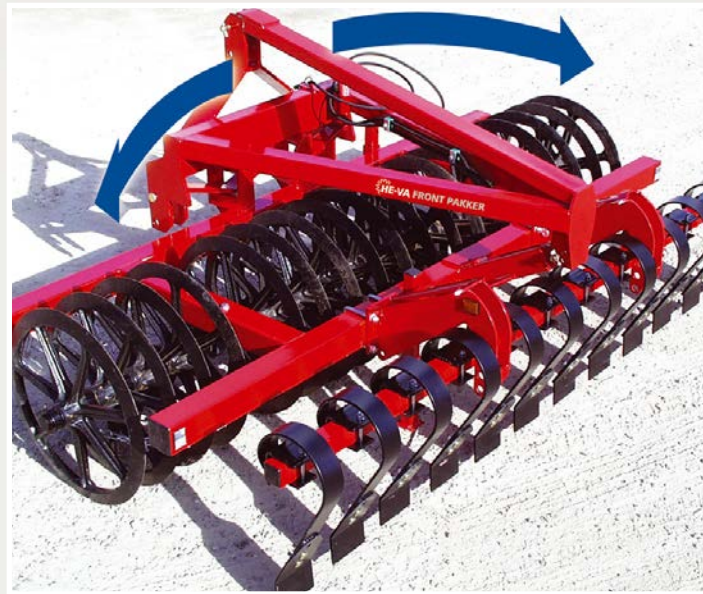


STEERING

With the integrated steering, the Front-Roller is actually trailed rather than pushed - ensuring that it follows the nose of the tractor steering smoothly even at speed.

The steering rollers (pictured below) self-centre the press to prevent it swaying around when lifted to turn on the headland or in transport.


HEAVY DUTY HEADSTOCK

As with all HE-VA Front Equipment, the headstock is designed to cope with the heaviest ring combination and attachment of a front harrow or a Spring-Board.

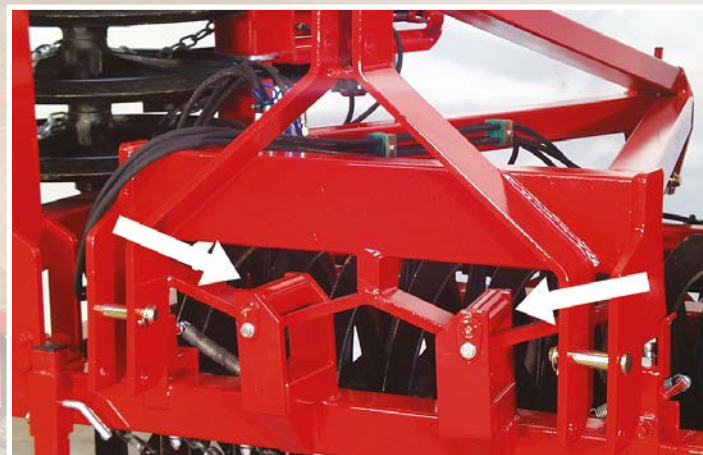

BUSHES

To increase the service life of the Front Equipment, It is equipped with bushes for pins, locked by the ring split.

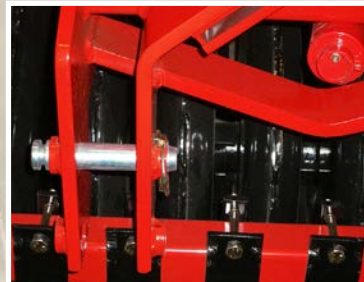

Ring Types

Choose the rings best suited for the job at hand. HE-VA will produce the Front-Roller of your choice, making it easier for you to improve cultivation and consolidation.



Cambridge

Front-Roller is available with 510 mm, 560 mm or 620 mm Cambridge rings with 3, 8, 9 or 10 spokes, suitable for crushing clods and consolidation of the soil in the top 10 cm. Cambridge leaves the surface nicely structured and even. The breaker rings increase the aggressiveness on heavier soil and keep the rings clean.

Crosskill

Front-Roller is available with 485/530 mm and 550/600 mm Crosskill rings, which work aggressively on the soil and leave a fine loose soil layer ready for seeding. For the Crosskill not to stick to/fill with soil, every other ring is larger and movable on a loose hub, achieving the same radius towards the ground and thus even soil compaction. When the soil has to release the rings, the loose rings are pressed up, which makes the self-cleaning better.

Star ring

Front-Roller is available with 450/500 mm and 550/600 mm star rings, which leave the soil packed with a loosely structured and slightly ridged surface. Chosen where the Front-Roller, in addition to roller tasks, is also used for soil compaction and the production of seedbeds.

V-Profile

Front-Roller is available with 600 mm and 700 mm V-Profile rings, which leave a perfect surface finish. With a high level of robustness, this ring type can handle very stony fields and even large rocks.

Front-Roller TWIN



Front-Roller Twin is shown here in 3.00 m working width with 550/550 mm Star Rings and Spring-Board with standard 8 x 150 mm spikes. The machine is also available with 450/450 mm star rings.

This machine packs the soil very efficiently via the double star roller, leaving the soil with a structured and loose surface, which is particularly suitable for subsequent sowing.

600 and 700 mm V-Profile

This strong V-Profile ring is produced out of pressed 5 mm steel plates - castellated - forming the aggressive profile. Hereby a higher strength level is achieved.



The good strength qualities, its high weight together with the steel scrapers between the rings, make this ring highly suitable for sticky and clayey soils.

The rings can turn individually but are linked by a series of lugs that ensure they all drive together and continue to turn in wet and sticky conditions.



Front-Roller Compact

The Front-Roller Compact is approximately 48 cm shorter than a standard Front-Roller and was developed in collaboration with customers who requested solutions capable of meeting country-specific transport regulations.

The Front-Roller Compact is available in both self-steering and non-self-steering versions.

Self-Steering



Non-Self-Steering



The Front-Roller Compact is also available with a Cutter-Roller knife roller in working widths 3.00 and 3.50 m.



Cutter-Roller

The Cutter-Roller with eight hard metal knives provides efficient chopping and faster decomposition of crop residues.