
GRASS-COMBI







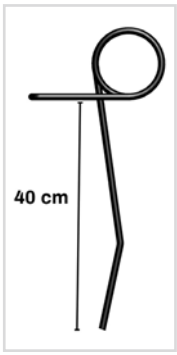

- The angle of the harrow tines can be adjusted during work.
- Three-point linkage with cat. 3 pins and cat. 2 distance.
- Cat. 3 snap couplings with cat. 2 spacing for drawbar.
- Robust 12 mm harrow tines.

MACHINES

Work Width, m	Type	Description	Number of Tines	Row Spacing, mm	Transport Width, mm	Height in Transp. Pos., mm	Weight, kg	Item Number
6.00	Foldable	2 rows of 12 mm harrow tines prepared f/Multi-Seeder without AC/EC	66	90	2,480	3,200	1,575	63089-10
6.00	Foldable	2 rows of 12 mm harrow tines prepared f/Multi-Seeder with AC/EC	66	90	2,480	3,200	1,600	63089-15
6.00	Foldable	3 rows of 12 mm harrow tines prepared f/Multi-Seeder without AC/EC	80	75	2,480	3,200	1,725	63089-20
6.00	Foldable	3 rows of 12 mm harrow tines prepared f/Multi-Seeder with AC/EC	80	75	2,480	3,200	1,750	63089-25
7.00	Foldable	2 rows of 12 mm harrow tines prepared f/Multi-Seeder without AC/EC	78	90	2,480	3,650	1,715	63089-11
7.00	Foldable	2 rows of 12 mm harrow tines prepared f/Multi-Seeder with AC/EC	78	90	2,480	3,650	1,740	63089-16
7.00	Foldable	3 rows of 12 mm harrow tines prepared f/Multi-Seeder without AC/EC	93	75	2,480	3,650	1,865	63089-21
7.00	Foldable	3 rows of 12 mm harrow tines prepared for Multi-Seeder with AC/EC	93	75	2,480	3,650	1,890	63089-26

STANDARD EQUIPMENT

- Wheels - 4 pcs.: 18.5x8.5x8 – 6 PLY.
- Hydraulic adjustment of harrow tines.
- Incl. 2 pcs. of double-acting hydraulic outlets and extension cord for lights.
- It has been prepared for mounting of Multi-Seeder.
  - Multi-Seeder: Only 200 l and 410 l (twisted) with 8/16 outlet.
- Wire between harrow sections ensuring that the tines do not fall off if damaged.

EXTRA EQUIPMENT

Work Width, m	Description	Item Number
6.00 - 7.00	Removable light bar with LED, mounted on three point hitch	63089-29
6.00 - 7.00	Set of reflective warning boards (2 pieces)	67055-74
6.00	Levelling board with stepless adjustment of height	63089-35
7.00	Levelling board with stepless adjustment of height	63089-36
6.00	Spring-Board with stepless spindle adjustment of height	63089-40
7.00	Spring-Board with stepless spindle adjustment of height	63089-41
6.00	Hydraulic adjustment of the aggressivity of the Spring-Board	63089-42
7.00	Hydraulic adjustment of the aggressivity of the Spring-Board	63089-43
-	1 extra set of double-acting hydraulic outlet (mounted on Grass-Combi)	63089-45
-	Drawbar / Clevis for mounting on the harrow's lift arms, cat. II	64519-31
-	Mechanical double diverter valve between position of tine and hydr. folding	67086-15
-	A set of air brake outlets	63089-31