


FRONT-LIFT 15.01 – Integrated Model

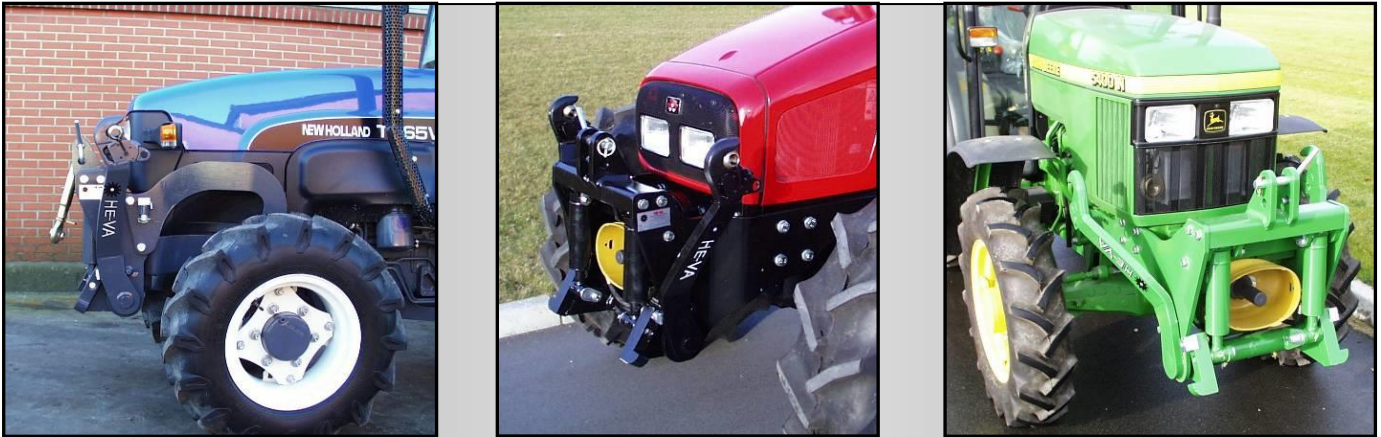

- Front-Lift with 1,500 kg lifting capacity with 190 bar.
- Integrated most possible for tractor with respect to design & space requirement.
- Individual lift arms with 4 possible positions: a) free moving b) limited moving c) locked position d) transport position.
- Good for 3 and 4 cylinder tractors with approx. 30 HP to 80 HP.
- When not using the lift, the arms can be pulled up/backwards & the tractor length is reduced.
- Can be adapted to Front-PTO.

PRICES With adapted side bracket plates: Look in "Tractor Makes / Model List").

Designation	Weight kg	Item Number
15.01 without adapted side bracket bars		66402-00
Bolt brackets incl. bolts for 15.01		66402-01

STANDARD EQUIPMENT

- Single acting hydr. with air filter on lowering side.
- Cat. 2, DS/ISO 8759/1/2, 825 mm between the lift arms' balls.
- Cleaned and painted with a two-component primer and finally painted in the tractor's colour - two-component.
- Adapted to the individual tractor model.
- Chassis bolts & 5.5 m hydr. hoses with couplings.
- Stop valve device on hydr. hose at tractor connection – the lift can then be locked.
- Quick-coupling for lift-arms, cat. 2-S with ø28 mm balls.
- Top link M27 and Ø25 mm pin with parking device for the lift arms' balls.
- **For several models:** direct hydr. connection. Look after * in "Tractor Makes / Model List".

EXTRA EQUIPMENT (Description of extra equipment - look at page 2).

Designation	Weight kg	Item No.
Accessory kit from single to double acting front-linkages, mount.	4	66495-00
Shock absorber kit incl. hoses and fittings, mounted	4	66485-00
Spring suspension kit incl. hoses and fittings, mounted	16	66490-00
Shift-Control Double, El-shift between Front-Lift and one outlet	8	65100-10
Shift-Control Triple, El-shift between Front-Lift and two outlets	14	65100-12
Double oil outlet on Front-Lift, with hoses from tractor outlet	9	65100-20
Holders for relief springs per set	7	664005001
Torsion bar	20	664003005