


FRONT-LIFT 21.01 – Standard

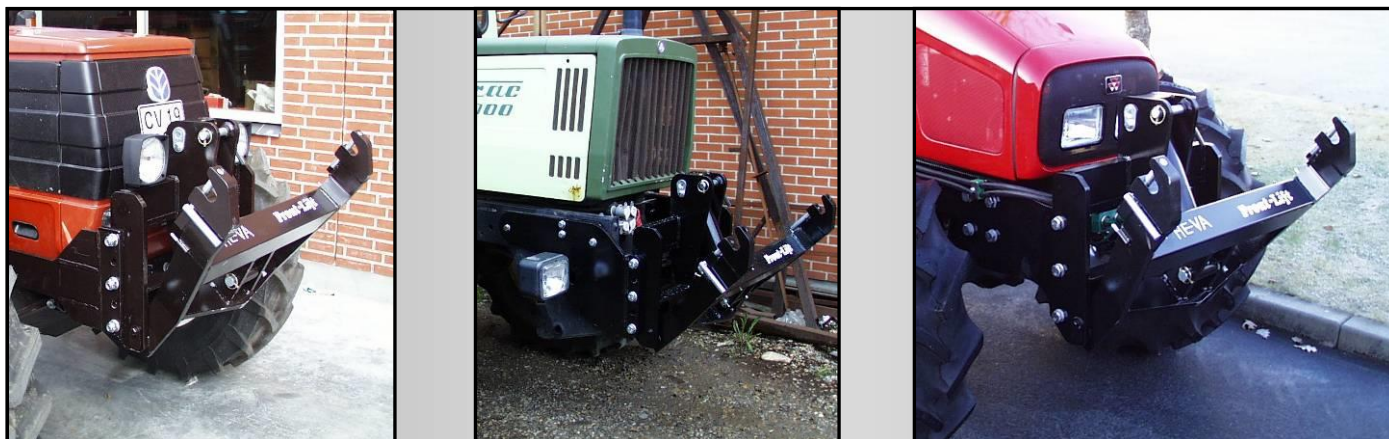

- Front-Lift with 2,100 kg lifting capacity with 175 bar.
- Short lift arms with 2 possible cylinder positions - providing a big lifting area.
- Good for tractors with 40 HP to 120 HP.
- Is not adapted to Front-PTO system.
- The Front-Lift is as standard supplied without "side bracket bars", however adapted side bracket bars can after option be supplied and made for almost all tractor models.

PRICES For adapted side bracket bars: Look in "Tractor Makes / Model List").

Designation	Weight kg	Item Number	
21.01 single acting oil outlet, without side bracket bars	165	66050-00	
Multi-Purpose side bracket bars, not adapted to lift, 2m long	100	66900-00	

STANDARD EQUIPMENT

- Single acting hydr. with air filter on lowering side.
- Cat. 2 DS/ISO 8759/1/2. 825 mm between the lift arms' coupling points.
- Cleaned and painted with a two-component primer and finally painted in grey-black colour. If the lift is ordered with adapted side bracket bars, the lift will be painted in the tractor's colour.
- 5.5 m hydr. hoses with couplings.
- Stop valve device on hydr. hose at tractor connection – the lift can then be locked.
- Quick-coupling for lift-arms, cat. 2-S with $\varnothing 28$ mm balls.
- Top link M30 and $\varnothing 25$ mm balls and pins.
- Bolts for side bracket bars – for mounting on the front-lift.
- When ordering the lift with adapted side bracket bars, chassis bolts are included.

EXTRA EQUIPMENT (Description of extra equipment – look at page 2).

Designation	Weight kg	Item Number	
Accessory kit from single to double acting front-linkages, mount.	4	66095-00	
Shock absorber kit incl. hoses and fittings, mounted	4	66050-01	
Spring suspension kit incl. hoses and fittings, mounted	16	66051-01	
Shift-Control Double, EI-shift between front-lift and one outlet	8	65100-10	
Shift-Control, Triple, EI-shift between front-lift and two outlets	14	65100-12	
Double oil outlet on Front-Lift, with hoses from tractor outlet	9	65100-20	
Lights mounted on Front-Lift 60/55w		690148001	