


MULTI-PURPOSE LIFT 40.01 & 55.01

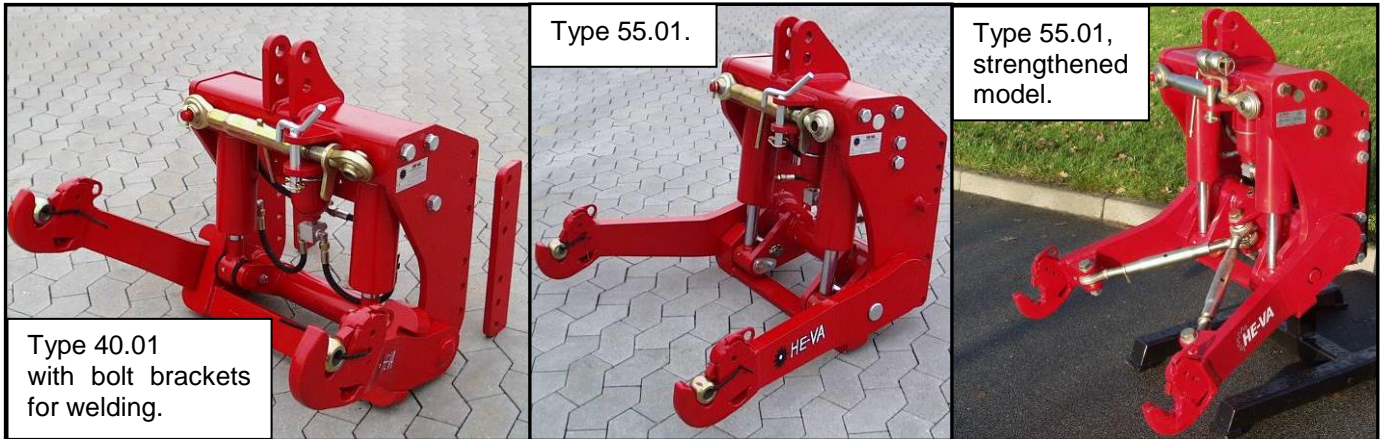

- Multi-Purpose Lifts with 4,000 kg and 5,500 kg lifting capacity with 190 bar.
- Ideal for many functions.
- Constructed to last for big forces as twisting and sudden pressures.

PRICES

Designation	Weight kg	Item Number	
40.01 without bolt brackets. For max. 12 tonnes slurry trailer tankers / max. 4 m injectors.	190	66702-00	
55.01 without bolt brackets. For max. 15 tonnes slurry trailer tankers / max. 6 m injectors.	250	66802-00	
55.01 without bolt brackets. Strengthened model f/mounting on all sizes of slurry trailer tanks / injectors.	275	66803-00	

STANDARD EQUIPMENT

- Double acting hydraulics.
- Cat. 2, DS/ISO 8759/1/2, 825 mm between lift arms' balls.
- Cleaned and painted with a two-component primer and finally painted in red colour – two-component.
- Can after request be painted in other colours without additional costs.
- Hydr. hoses between cylinder in a 3/8" coupling.
- Quick-coupling for lift arms, cat. 3 with Ø28 mm balls, cat. 3/2.
- Top link M36 and Ø25 mm pin with parking device for the lift arms' balls.
- Parking device for top link.
- The model for slurry trailer tanks is strengthened with top links between the lifting arms for greater strength when driving with big tanker with wide implement – This model has mechanical locking chain in top position (for drip hose boom).

EXTRA EQUIPMENT (Description of extra equipment – look at page 2).

Designation	Weight kg	Item Number	
Bolt brackets and bolts for 40.01	6	66702-01	
Bolt brackets and bolts for 55.01	10,2	66802-01	
Hydraulic hoses 5,5 m with quick coupling - male each	4	690201302	
Shock absorber kit incl. hoses and fittings, mounted for 40.01	4	66785-00	
Shock absorber kit incl. hoses and fittings, mounted for 55.01	4	66885-00	
Spring suspension kit incl. hoses and fittings, mounted f/40.01	16	66790-00	
Spring suspension kit incl. hoses and fittings, mounted f/55.01	16	66890-00	