


RONDO-DAN

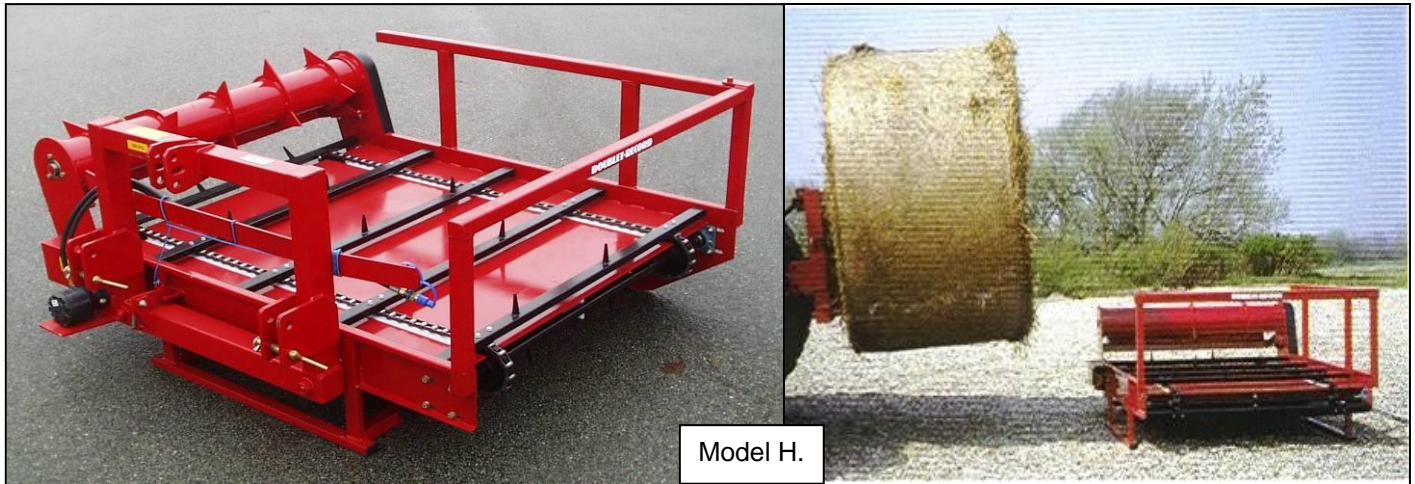

Model H.

- Ideal for round bales of: straw, hay, silage and similar materials.
- The three-point mounted bale-spikes collect the bale and place it on the unwinder table. Then it is used as quick-coupler for the table.
- Efficient for use in large barns, chicken houses, feed alleys and on fields.
- Dustless and careful treatment of the straws.
- Model H + V has a roller on both sides and is able to unwind either to the right or to the left. The unwinding is controlled by the double-acting oil outlet on the tractor.

PRICES

Model	Round Bale Unwinder	Item Number	
* H	Rondo-Dan, complete with unwinding to the right	2900201	
* V	Rondo-Dan, complete with unwinding to the left	2900206	
*H + V	Rondo-Dan, complete w/unwinding to the right or to the left	2900211	

* The machine requires 1 double-acting oil outlet with min. 30 l/min.

STANDARD EQUIPMENT

- Hydraulic motor with 35 mm shafts and claw coupling to the table.
- Unwinding roller with 5 tines.
- Safety railing around the platform.
- Three-point mounting with two integrated spikes.
- Pins and locking pins.

Extra equipment:
Hydr. operation of the locking pawl for the unwinder table.



EXTRA EQUIPMENT

Designation	Item Number	
Hydr. operation of the locking pawl for the unwinder table.	2900900	
EURO coupling instead of three-point mounting for front loader Add. price	2900910	

SPECIFICATIONS

Unwinder Direction	Working Width	Length	Weight kg	Lifting Req., kg	Max. Weight of Bale, kg	Max. Bale Diameter	Max. Bale Width
Right	2.15 m	2.00 m	577	1100	850	1.80 m	1.50 m
Left	2.15 m	2.00 m	577	1100	850	1.80 m	1.50 m
Right or Left	2.25 m	2.00 m	660	1200	850	1.80 m	1.50 m