

VIP-ROLLER NG



- Compact construction of sectional tubes.
- Low transport height – stable and safe transport.
- Simple transfer between transport and working position.
- Hydraulic system released during transport/storage.
- 60 mm axles, special quality, and triple-sealed ball bearings.
- Transport width of max. 2.45 m.

MACHINES

| Work Width, m | Ring Type | No. of Rings | No. of Spokes | Power Req., HP | Weight, kg | Item Number | |
|---------------|------------------------|--------------|---------------|----------------|------------|----------------|----------|
| 4.50 | 510 mm/21" Cambridge | 1* | 87 | 3 | 60-80 | 2,120 | 63201-51 |
| 4.50 | 510 mm/21" Cambridge | 1* | 87 | 8 | 60-80 | 2,220 | 63201-46 |
| 4.50 | 560 mm/22.5" Cambridge | 1* | 87 | 9 | 70-90 | 2,500 | 63201-54 |
| 4.50 | 620 mm/24" Cambridge | 1* | 87 | 10 | 70-90 | 2,770 | 63201-62 |
| 4.50 | 450/500 mm Star ring | •/1* | 84 | - | 60-80 | 2,120 | 63201-56 |
| 4.50 | 550/600 mm Star ring | •/1* | 84 | - | 70-90 | 2,530 | 63201-57 |
| 4.50 | 550 mm Cam ring | 1* | 30 | - | 60-80 | 1,470 | 63201-55 |
| 4.50 | 485-530 mm Crosskill | 1* | 45 | - | 60-80 | 1,940 | 63201-53 |
| 4.50 | 550-600 mm Crosskill | 1* | 45 | - | 70-90 | 2,420 | 63201-63 |
| 4.50 | 500 mm 2D-Corrugated | 1* | 57 | 8 | 60-80 | 1,950 | 63201-50 |
| 4.50 | 550 mm 2D-Corrugated | 1* | 57 | 9 | 70-90 | 2,190 | 63201-59 |
| 4.50 | 600 mm 2D-Corrugated | 1* | 57 | 10 | 70-90 | 2,340 | 63201-60 |
| 5.40 | 510 mm/21" Cambridge | 1* | 105 | 3 | 70-90 | 2,520 | 63202-51 |
| 5.40 | 510 mm/21" Cambridge | 1* | 105 | 8 | 70-90 | 2,650 | 63202-46 |
| 5.40 | 560 mm/22.5" Cambridge | 1* | 105 | 9 | 80-100 | 3,060 | 63202-54 |
| 5.40 | 620 mm/24" Cambridge | 1* | 105 | 10 | 80-100 | 3,200 | 63202-62 |
| 5.40 | 450/500 mm Star ring | •/1* | 98 | - | 70-90 | 2,570 | 63202-56 |
| 5.40 | 550/600 mm Star ring | •/1* | 98 | - | 80-100 | 3,100 | 63202-57 |
| 5.40 | 550 mm Cam ring | 1* | 36 | - | 70-90 | 1,840 | 63202-55 |
| 5.40 | 485-530 mm Crosskill | 1* | 54 | - | 70-90 | 2,410 | 63202-53 |
| 5.40 | 550-600 mm Crosskill | 1* | 54 | - | 80-100 | 2,970 | 63202-63 |
| 5.40 | 500 mm 2D-Corrugated | 1* | 69 | 8 | 70-90 | 2,390 | 63202-50 |
| 5.40 | 550 mm 2D-Corrugated | 1* | 69 | 9 | 80-100 | 2,690 | 63202-59 |
| 5.40 | 600 mm 2D-Corrugated | 1* | 69 | 10 | 80-100 | 2,930 | 63202-60 |
| 6.30 | 510 mm/21" Cambridge | 1* | 123 | 3 | 80-100 | 2,860 | 63203-51 |
| 6.30 | 510 mm/21" Cambridge | 1* | 123 | 8 | 80-100 | 3,050 | 63203-46 |
| 6.30 | 560 mm/22.5" Cambridge | 1* | 123 | 9 | 100-120 | 3,520 | 63203-54 |
| 6.30 | 620 mm/24" Cambridge | 1* | 123 | 10 | 100-120 | 4,000 | 63203-62 |
| 6.30 | 450/500 mm Star ring | •/1* | 120 | - | 80-100 | 2,920 | 63203-56 |
| 6.30 | 550/600 mm Star ring | •/1* | 120 | - | 120-120 | 3,680 | 63203-57 |
| 6.30 | 550 mm Cam ring | 1* | 42 | - | 80-100 | 2,030 | 63203-55 |
| 6.30 | 485-530 mm Crosskill | 1* | 63 | - | 80-100 | 2,690 | 63203-53 |
| 6.30 | 550-600 mm Crosskill | 1* | 63 | - | 100-120 | 3,300 | 63203-63 |
| 6.30 | 500 mm 2D-Corrugated | 1* | 78 | 8 | 80-100 | 2,750 | 63203-50 |
| 6.30 | 550 mm 2D-Corrugated | 1* | 78 | 9 | 90-110 | 3,060 | 63203-59 |
| 6.30 | 600 mm 2D-Corrugated | 1* | 78 | 10 | 90-110 | 3,200 | 63203-60 |
| 6.30 | 610 mm Plain roller | 1*/2* | - | - | 90-110 | 2,050 3,670 | 63203-61 |

*Requires 2 double-acting oil outlets

**Weight designation: Respectively without and with water.

• Steel cast ring, 8 year breakage warranty

MACHINES (CONTINUED)

| Work Width, m | Ring Type | No. of Rings | No. of Spokes | Power Req., HP | Weight, kg | Item Number | |
|---------------|------------------------|-------------------|---------------|----------------|------------|-------------|----------|
| 7.30 | 510 mm/21" Cambridge | ¹ * | 143 | 3 | 100-120 | 3,440 | 63204-51 |
| 7.30 | 510 mm/21" Cambridge | ¹ * | 143 | 8 | 100-120 | 3,650 | 63204-46 |
| 7.30 | 560 mm/22.5" Cambridge | ¹ * | 143 | 9 | 120-140 | 4,240 | 63204-54 |
| 7.30 | 620 mm/24" Cambridge | ¹ * | 143 | 10 | 120-140 | 4,390 | 63204-62 |
| 7.30 | 450/500 mm Star ring | •/ ¹ * | 140 | - | 100-120 | 3,570 | 63204-56 |
| 7.30 | 550/600 mm Star ring | •/ ¹ * | 140 | - | 120-140 | 4,490 | 63204-57 |
| 7.30 | 550 mm Cam ring | ¹ * | 48 | - | 100-120 | 2,520 | 63204-55 |
| 7.30 | 485-530 mm Crosskill | ¹ * | 73 | - | 100-120 | 3,270 | 63204-53 |
| 7.30 | 550-600 mm Crosskill | ¹ * | 73 | - | 120-140 | 4,190 | 63204-63 |
| 7.30 | 500 mm 2D-Corrugated | ¹ * | 90 | 8 | 100-120 | 3,330 | 63204-50 |
| 7.30 | 550 mm 2D-Corrugated | ¹ * | 90 | 9 | 110-130 | 3,670 | 63204-59 |
| 7.30 | 600 mm 2D-Corrugated | ¹ * | 90 | 10 | 110-130 | 3,820 | 63204-60 |
| 7.60 | 510 mm/21" Cambridge | ¹ * | 151 | 3 | 100-120 | 3,564 | 63206-51 |
| 7.60 | 510 mm/21" Cambridge | ¹ * | 151 | 8 | 100-120 | 3,804 | 63206-46 |
| 7.60 | 560 mm/22.5" Cambridge | ¹ * | 151 | 9 | 120-140 | 4,418 | 63206-54 |
| 7.60 | 620 mm/24" Cambridge | ¹ * | 151 | 10 | 120-140 | 4,568 | 63206-62 |
| 7.60 | 450/500 mm Star ring | •/ ¹ * | 148 | - | 100-120 | 3,710 | 63206-56 |
| 7.60 | 550/600 mm Star ring | •/ ¹ * | 148 | - | 120-140 | 4,640 | 63206-57 |
| 7.60 | 550 mm Cam ring | ¹ * | 45 | - | 100-120 | 2,588 | 63206-55 |
| 7.60 | 485-530 mm Crosskill | ¹ * | 79 | - | 100-120 | 3,340 | 63206-53 |
| 7.60 | 550-600 mm Crosskill | ¹ * | 79 | - | 120-140 | 4,290 | 63206-63 |
| 7.60 | 500 mm 2D-Corrugated | ¹ * | 99 | 8 | 100-120 | 3,440 | 63206-50 |
| 7.60 | 550 mm 2D-Corrugated | ¹ * | 99 | 9 | 110-130 | 3,792 | 63206-59 |
| 7.60 | 600 mm 2D-Corrugated | ¹ * | 99 | 10 | 110-130 | 3,950 | 63206-60 |
| 8.20 | 510 mm/21" Cambridge | ¹ * | 157 | 3 | 120-140 | 3,860 | 63205-51 |
| 8.20 | 510 mm/21" Cambridge | ¹ * | 157 | 8 | 120-140 | 4,000 | 63205-46 |
| 8.20 | 560 mm/22.5 Cambridge | ¹ * | 157 | 9 | 130-160 | 4,510 | 63205-54 |
| 8.20 | 620 mm/24" Cambridge | ¹ * | 157 | 10 | 130-160 | 5,010 | 63205-62 |
| 8.20 | 450/500 mm Star ring | •/ ¹ * | 152 | - | 120-140 | 3,990 | 63205-56 |
| 8.20 | 550/600 mm Star ring | •/ ¹ * | 152 | - | 130-160 | 4,930 | 63205-57 |
| 8.20 | 550 mm Cam ring | ¹ * | 55 | - | 120-140 | 2,820 | 63205-55 |
| 8.20 | 485-530 mm Crosskill | ¹ * | 81 | - | 120-140 | 3,690 | 63205-53 |
| 8.20 | 550-600 mm Crosskill | ¹ * | 81 | - | 130-160 | 4,710 | 63205-63 |
| 8.20 | 500 mm 2D-Corrugated | ¹ * | 102 | 8 | 120-140 | 3,650 | 63205-50 |
| 8.20 | 550 mm 2D-Corrugated | ¹ * | 102 | 9 | 120-150 | 3,910 | 63205-59 |
| 8.20 | 600 mm 2D-Corrugated | ¹ * | 102 | 10 | 120-150 | 4,160 | 63205-60 |

¹Requires 2 double-acting oil outlets

* Steel cast ring, 8 year breakage warranty

STANDARD EQUIPMENT

- Adjustable jack stand.
- Towing eye, secured by bolts, item no. 630757028.
- Wheels:
 - 4.50 m – 5.40 m: 10.0/75x15.3, 10 PLY
 - 6.30 m – 8.20 m: 11.5/80x15.3, 14 PLY
- Triple-sealed ball bearings.
- Parking device for hydr. hoses.

EXTRA EQUIPMENT

| Description | Weight, kg | Item Number |
|---|-----------------|-------------|
| LED lights cpl. with wire and socket, mounted on 4.50 -5.40 m | | 63201-22 |
| LED lights cpl. with wire and socket, mounted on 6.30-7.30-7.60-8.20 m | | 63203-22 |
| Hydraulic supporting leg for 4.50-8.20 m (Additional price) | ¹ 15 | 63053-40 |
| Mechanical double change-over valve, mounted on draw-bar, for tractors requiring another double-acting oil outlet | 5 | 690207102 |
| Electrically operated double change-over valve, with contact to the cab, for tractors with too few double-acting oil outlets. | 8 | 690207105 |
| Draw-bar extension, 500 mm for 4.50 / 5.40 m | 42 | 630779000 |
| Draw-bar extension, 500 mm for 6.30 / 7.30 / 7.60 / 8.20 m | 42 | 630779020 |
| Air brakes, factory-mounted | 18 | 63098-07 |
| Hydraulic brakes, factory-mounted | 7 | 63098-08 |
| Stone box set (additional 2 pieces) for 4.50 / 5.40 / 6.30 / 7.30 / 7.60 / 8.20 m | - | 63201-20 |
| Weight transition kit (SAT-system) for 4.50 – 5.40 m. | - | 63201-21 |
| Weight transition kit (SAT-system) for 6.30 – 8.20 m. | - | 63203-23 |
| Wheel 11.5/80 x 15.3, 14 PLY, only for Vip-Roller NG 4.50 and 5.40 m. (Additional price per set) | - | 63080-10 |
| Wheels 400/60 x 15.5 – 16 PLY, only for Vip-Roller NG 6.30, 7.30, 7.60 and 8.20 m (all ring types). NB: Transport width: 2.56 m. (Additional price per set) | - | 63080-09 |
| Electronic area counter, mounted | - | 0539317 |

¹Requires 1 double-acting oil outlet

EXTRA EQUIPMENT (CONTINUED)

CAST STEEL RINGS


| Description | Weight, kg | Item Number |
|---|------------|-------------|
| 510 mm/21" Cambridge / 550 mm 2D-Corrugated. Steel cast quality. 8 spokes. Recommended in a non-ploughed syst. and in extreme conditions. (Add. price per m) | + 8 per m | 690150078 |
| 560 mm/22.5" Cambridge / 550 mm 2D-Corrugated. Steel cast quality. 9 spokes. Recommended in a non-ploughed syst. and in extreme conditions. (Add. price per m) | + 10 per m | 690150077 |
| 620 mm/24" Cambridge / 600 mm 2D-Corrugated. Steel cast quality. 10 spokes. Recommended in a non-ploughed syst. and in extreme conditions. (Add. price per m) | + 10 per m | 690150118 |

8 YEAR WARRANTY ON STEEL CAST RINGS




SPRING-BOARD

| Work Width, m | Description | No. of Tines | Power Req., HP | Weight, kg | Item Number |
|--|---|--------------|----------------|------------|-------------|
| 4.50 | Spring-Board | 20 | +20 | 420 | 63201-00 |
| 5.40 | Spring-Board | 22 | +25 | 485 | 63202-00 |
| 6.30 | Spring-Board | 24 | +30 | 550 | 63203-00 |
| 7.30 | Spring-Board | 28 | +35 | 630 | 63204-00 |
| 7.60 | Spring-Board | - | +35 | 655 | 63206-00 |
| 8.20 | Spring-Board | 32 | +40 | 695 | 63205-00 |
| 4.50 | Spring-Board with slicing plates | - | - | - | 63201-05 |
| 5.40 | Spring-Board with slicing plates | - | - | - | 63202-05 |
| 6.30 | Spring-Board with slicing plates | - | - | - | 63203-05 |
| 7.30 | Spring-Board with slicing plates | - | - | - | 63204-05 |
| 7.60 | Spring-Board with slicing plates | - | - | - | 63206-05 |
| 8.20 | Spring-Board with slicing plates | - | - | - | 63205-05 |
| 4.50 | Spring-Board with Ø16 longfinger tines | - | - | - | 63201-10 |
| 5.40 | Spring-Board with Ø16 longfinger tines | - | - | - | 63202-10 |
| 6.30 | Spring-Board with Ø16 longfinger tines | - | - | - | 63203-10 |
| 7.30 | Spring-Board with Ø16 longfinger tines | - | - | - | 63204-10 |
| 7.60 | Spring-Board with Ø16 longfinger tines | - | - | - | 63206-10 |
| 8.20 | Spring-Board with Ø16 longfinger tines | - | - | - | 63205-10 |
| - | Edge equipment set for Spring-Board tines | - | - | 5 | 63301-00 |
| TRANSVERSE LOCKING SYSTEM - CONNECTS THE SPRING-BOARD TINES | | | | | |
| 4.50 | Complete set for Spring-Board | - | - | 55 | 63201-15 |
| 5.40 | Complete set for Spring-Board | - | - | 64 | 63202-15 |
| 6.30 | Complete set for Spring-Board | - | - | 74 | 63203-15 |
| 7.30 | Complete set for Spring-Board | - | - | 86 | 63204-15 |
| 7.60 | Complete set for Spring-Board | - | - | 89 | 63206-15 |
| 8.20 | Complete set for Spring-Board | - | - | 97 | 63205-15 |



"EASY-CHANGE" QUICK CHANGE SYSTEM OF WEAR POINTS INCL. ONE SET OF FLAT WEAR POINTS AND ONE SET OF SLICING PLATE POINTS WITH 3 TINES.

| Description | Item Number |
|--|-------------|
| Additional price per tine in relation to standard Spring-Board | 63302-00 |
| Price per tine for retro mounting | 63302-01 |

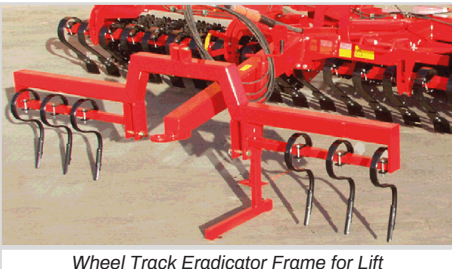

WHEEL TRACK ERADICATOR FRAME FOR LIFT

| Description | Item Number |
|--|-------------|
| 3.00 m. three-point mounted, 6 tines (65x12 mm) | 67701-00 |
| 4.00 m. three-point mounted, 8 tines (65x12 mm) | 67702-00 |