




Top-Cutter Solo

For optimal shredding and accelerated decomposition of crops

3.00 m hydraulic Top-Cutter Solo Twin with LED lights, double three-point suspension and material damper guard

Technical Specifications



3.00 - 6.00 m



2.75 - 4.00 m



700 - 2,050 kg



60 - 120 hp

Working width, m	Transport width, m	Type	Model	Diameter incl. knives, mm	Weight, kg
3.00	3.00	Rigid	Single	Ø390	700
3.50	3.50	Rigid	Single	Ø390	780
4.00	4.00	Rigid	Single	Ø390	890
4.00	2.75	Hydraulic	Single	Ø390	1,250
5.00	2.75	Hydraulic	Single	Ø390	1,360
6.00	2.75	Hydraulic	Single	Ø390	1,650
3.00	3.00	Rigid	Twin	Ø390	990
3.50	3.50	Rigid	Twin	Ø390	1,043
4.00	4.00	Rigid	Twin	Ø390	1,180
4.00	2.75	Hydraulic	Twin	Ø390	1,620
5.00	2.75	Hydraulic	Twin	Ø390	1,810
6.00	2.75	Hydraulic	Twin	Ø390	2,050



Tel.: +45 97 72 42 88
Fax: +45 97 72 21 12
E-mail: info@he-va.com
Web: www.he-va.com

N.A. Christensensvej 34
DK-7900 Nykøbing Mors

Your HE-VA dealer



HE-VA reserves the right to make design and construction changes without notice



The Top-Cutter Solo ensures efficiency and flexibility

Crops Cut in 2 Different Directions

The TWIN-models' knife rollers are placed with opposite cutting directions and therefore cuts crops in 2 different directions to achieve better shredding and faster decomposition. In addition, the catch crops are crushed and incorporated into the soil. The six blades ensure a smooth and stable workflow.



Closed Tube Construction

HE-VA's unique closed tube design is extremely advantageous. It prevents soil and residues from building up and sticking to the construction.


This avoids unnecessary stops in the field and provides a continuous high level of efficiency.

One or Two Knife Rollers

The Top-Cutter Solo is available with both a single knife roller (SINGLE) and with two knife rollers (TWIN).

SINGLE

The Top-Cutter Solo SINGLE is often used in front of the tractor and in combination with a disc harrow or similar implement mounted behind the tractor.

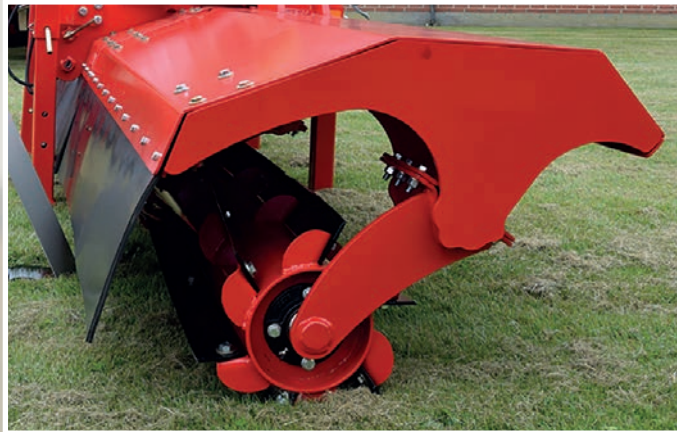

TWIN

The Top-Cutter Solo TWIN with double rotor ensures optimal cutting and mixing of stubble, etc.



Extra Equipment

Extra Weights

To achieve optimal cutting, especially in moist soil conditions, the Top-Cutter Solo can be equipped with additional weights of approx. 30 kg. The weights are mounted directly on the frame, which has been prepared for this. Max. 90 kg per working metre.



Double 3-Point Suspension

The Top-Cutter Solo is front-mounted as standard. The double 3-point suspension allows mounting behind the tractor.



Cutter-Board

Spring mounted levelling bar, mechanically height adjustable. Mounted in front of Top-Cutter Solo for maize- and rape stubble.



Material Damper Guard

Recommended for front-mounting to protect the front of the tractor from stones and dust.



Warning Board Set

Recommended for front-mounted implements. The boards can be removed to prevent them being damaged when driving close to plot boundaries, etc.



LED Lights

All machines can be fitted with light sets, rear lights, stop lights and indicators.



LED Marking Light Set

Recommended for front-mounted models.

