

Extra Equipment - Lift-Roller

Stone box set




Grass-Seeder Kit

Consists of longfinger harrow in front of the rings, Ø230 mm plain roller behind the implement and mounting set for Multi-Seeder.



LED Lights

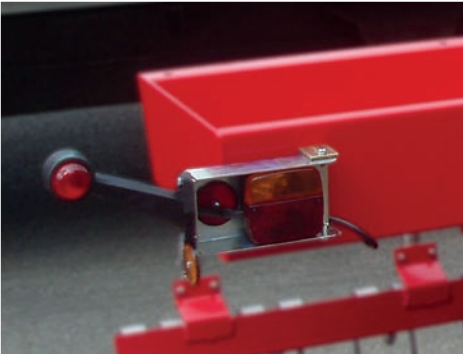

Warning Boards

Detachable warning boards for safer driving.




Extra Equipment - Vip-Roller

Stone box set



Hydraulic / Air brakes

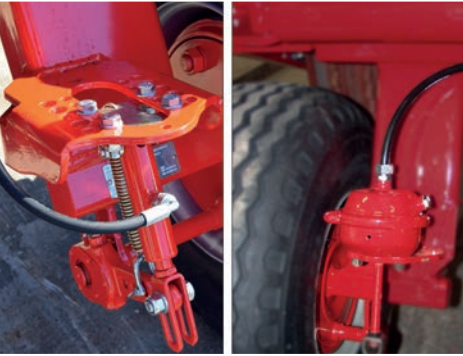

LED Lights




Wheel track eradicator




Technical Specifications

Lift-Roller


Lift-Roller




2.60 - 3.00 m








2.60 - 3.00 m












30 - 60 hp



680 - 1,430 kg

|                              |             | Cambridge   |        |        |        | Star ring   |            | Cam   | Crosskill   |            | 2D Corrugated   |        |        |
|------------------------------|-------------|---|--------|--------|--------|---|------------|---|---|------------|---|--------|--------|
|                              |             |  |        |        |        |  |            |  |  |            |  |        |        |
| Working Width, m             | RING SIZE   | 510 mm  | 510 mm | 560 mm | 620 mm | 450/500 mm  | 550/600 mm | 550 mm  | 485/530 mm  | 550/600 mm | 500 mm  | 550 mm | 600 mm |
|                              | SPOKES      | 3   | 8      | 9      | 10     | -   | -          | -   | -   | -          | 8   | 9      | 10     |
|                              | WEIGHT, KG  | 930   | 1,101  | 1,160  | 1,250  | 980   | 1,230      | 680   | 730   | 1,050      | 830   | 860    | 880    |
|                              | RINGS, PCS. | 45  | 45     | 45     | 45     | 42  | 42         | 16  | 25  | 25         | 31  | 31     | 31     |
|                              | AXLE, MM    | 60  | 60     | 60     | 60     | 60  | 60         | 60  | 60  | 60         | 60  | 60     | 60     |
| 3.00<br>TRANSPORT W.<br>3.00 | WEIGHT, KG  | 1,060   | 1,261  | 1,320  | 1,430  | 1,110   | 1,400      | 820   | 830   | 1,170      | 920   | 960    | 990    |
|                              | RINGS, PCS. | 53  | 53     | 53     | 53     | 50  | 50         | 19  | 27  | 27         | 35  | 35     | 35     |
|                              | AXLE, MM    | 60  | 60     | 60     | 60     | 60  | 60         | 60  | 60  | 60         | 60  | 60     | 60     |

Vip-Roller

|                                   |                                   |   |        |        |   |       |  |   |       |  |   |       |  |   |       |        |       |
|-----------------------------------|-----------------------------------|---|--------|--------|---|-------|--|---|-------|--|---|-------|--|---|-------|--------|-------|
| Vip-Roller                        |                                   |  |        |        |  |       |  |  |       |  |  |       |  |   |       |        |       |
|                                   |                                   | 3.30 - 8.20 m   |        |        | 2.45 - 3.32 m   |       |  | 40 - 140 hp   |       |  | 1,090 - 3,980 kg  |       |  |   |       |        |       |
|                                   |                                   | Cambridge   |        |        | Star ring   |       |  | Cam   |       |  | Crosskill   |       |  | 2D Corrugated   |       |        |       |
|                                   |                                   |  |        |        |  |       |  |  |       |  |  |       |  |  |       |        |       |
| Working Width, m                  | RING SIZE                         | 510 mm  | 510 mm | 560 mm | 450/500 mm  |       |  | 550 mm  |       |  | 485/530 mm  |       |  | 500 mm  |       | 550 mm |       |
|                                   | SPOKES                            | 3   | 8      | 9      | -   |       |  | -   |       |  | -   |       |  | 8   |       | 9      |       |
|                                   | WEIGHT, KG                        | 1,500   | 1,739  | 1,830  | 1,520   |       |  | 1,090   |       |  | 1,430   |       |  | 1,470   |       | 1,730  |       |
|                                   | RINGS, PCS.                       | 63  | 63     | 63     | 60  |       |  | 22  |       |  | 33  |       |  | 41  |       | 41     |       |
| 3.30<br>TRANSPORT W.<br>2.32      | AXLE, MM                          | 60  | 60     | 60     | 60  |       |  | 60  |       |  | 60  |       |  | 60  |       | 60     |       |
| 3.70<br>TRANSPORT W.<br>2.32      | WEIGHT, KG                        | 1,640   | 1,910  | 2,000  | 1,670   |       |  | 1,150   |       |  | 1,570   |       |  | 1,610   |       | 1,900  |       |
|                                   | RINGS, PCS.                       | 71  | 71     | 71     | 68  |       |  | 25  |       |  | 37  |       |  | 46  |       | 46     |       |
|                                   | AXLE, MM                          | 60  | 60     | 60     | 60  |       |  | 60  |       |  | 60  |       |  | 60  |       | 60     |       |
|                                   | WEIGHT, KG                        | 1,870   | 2,170  | 2,260  | 1,890   |       |  | 1,330   |       |  | 1,780   |       |  | 1,830   |       | 2,160  |       |
| 4.10<br>TRANSPORT W.<br>2.32      | RINGS, PCS.                       | 79  | 79     | 79     | 76  |       |  | 28  |       |  | 41  |       |  | 51  |       | 51     |       |
|                                   | AXLE, MM                          | 60  | 60     | 60     | 60  |       |  | 60  |       |  | 60  |       |  | 60  |       | 60     |       |
|                                   | WEIGHT, KG                        | 2,020   | 2,190  | 2,450  | 2,050   |       |  | 1,420   |       |  | 1,890   |       |  | 1,910   |       | 2,140  |       |
|                                   | RINGS, PCS.                       | 87  | 87     | 87     | 84  |       |  | 30  |       |  | 45  |       |  | 57  |       | 57     |       |
| 4.50<br>TRANSPORT W.<br>2.32      | AXLE, MM                          | 60  | 60     | 60     | 60  |       |  | 60  |       |  | 60  |       |  | 60  |       | 60     |       |
| WHEELS: 10.0 / 80 X 12 - 10 PLY   |                                   |   |        |        |   |       |  |   |       |  |   |       |  |   |       |        |       |
| 5.40<br>TRANSPORT W.<br>2.45      | WEIGHT, KG                        | 2,450   | 2,600  | 3,020  | 2,520   |       |  | 1,790   |       |  | 2,300   |       |  | 2,340   |       | 2,880  |       |
|                                   | RINGS, PCS.                       | 105   | 105    | 105    | 98  |       |  | 36  |       |  | 54  |       |  | 69  |       | 69     |       |
|                                   | AXLE, MM                          | 60  | 60     | 60     | 60  |       |  | 60  |       |  | 60  |       |  | 60  |       | 60     |       |
|                                   | WEIGHT, KG                        | 2,830   | 3,040  | 3,610  | 2,890   |       |  | 2,000   |       |  | 2,670   |       |  | 2,730   |       | 3,140  |       |
| 6.30<br>TRANSPORT W.<br>2.45      | RINGS, PCS.                       | 123   | 123    | 123    | 120   |       |  | 42  |       |  | 63  |       |  | 78  |       | 78     |       |
|                                   | AXLE, MM                          | 60  | 60     | 60     | 60  |       |  | 60  |       |  | 60  |       |  | 60  |       | 60     |       |
|                                   | WHEELS: 10.0 / 75 X 15.3 - 10 PLY |   |        |        |   |       |  |   |       |  |   |       |  |   |       |        |       |
|                                   | 7.30<br>TRANSPORT W.<br>2.45      | WEIGHT, KG  | 3,490  | 3,720  | 4,190   | 3,590 |  |   | 2,520 |  |   | 3,300 |  |   | 3,380 |        | 3,750 |
| RINGS, PCS.                       |                                   | 143   | 143    | 143    | 140   |       |  | 48  |       |  | 73  |       |  | 90  |       | 90     |       |
| AXLE, MM                          |                                   | 60  | 60     | 60     | 60  |       |  | 60  |       |  | 60  |       |  | 60  |       | 60     |       |
| WEIGHT, KG                        |                                   | 3,614   | 3,874  | 4,368  | 3,730   |       |  | 2,588   |       |  | 3,370   |       |  | 3,490   |       | 3,872  |       |
| 7.60<br>TRANSPORT W.<br>2.45      | RINGS, PCS.                       | 151   | 151    | 151    | 148   |       |  | 45  |       |  | 79  |       |  | 99  |       | 99     |       |
|                                   | AXLE, MM                          | 60  | 60     | 60     | 60  |       |  | 60  |       |  | 60  |       |  | 60  |       | 60     |       |
|                                   | WEIGHT, KG                        | 3,790   | 3,980  | -      | 3,820   |       |  | 2,790   |       |  | 3,610   |       |  | 3,690   |       | -      |       |
|                                   | RINGS, PCS.                       | 161   | 161    | -      | 152   |       |  | 55  |       |  | 81  |       |  | 102   |       | -      |       |
| 8.20<br>TRANSPORT W.<br>2.45      | AXLE, MM                          | 60  | 60     | -      | 60  |       |  | 60  |       |  | 60  |       |  | 60  |       | -      |       |
| WHEELS: 11.5 / 80 X 15.3 - 14 PLY |                                   |   |        |        |   |       |  |   |       |  |   |       |  |   |       |        |       |



Lift- & Vip-Roller

Simple, effective and just right!



Tel.: +45 97 72 42 88  
E-mail: info@he-va.com

Web: www.he-va.com

N.A. Christensensvej 34  
DK-7900 Nykøbing Mors

Your HE-VA dealer

HE-VA reserves the right to make design and construction changes without notice





# Lift-Roller

## Easy to lift

The Lift-Roller is simple to operate, even for unskilled operators and has its own in-built stand which flicks into place for storage.



## Simple Design

The Lift-Roller gives you a quick, easy solution to moisture retention and/or protection against slugs.

## Free Movement on the Drawbar

HE-VA always maintains that simple ideas prove the most effective solutions. The bottom link arms carry a connecting bar, which has free movement enabling the Lift-Roller to follow field contours eliminating any possibility of strain on the frame.



## The LIFT Finish

The Lift-Roller is designed so the gap left by the bearing is covered by the tractor wheeling for full width, even consolidation.



# Ring Options

## Cambridge rings

510, 560 & 620 mm - 3 / 8 / 9 / 10 spokes  
The Cambridge ring is a universal ring consisting of alternately plain and breaker rings. This ring efficiently consolidates stones and the bended profile is gentle on germinated plants. This combination results in an optimal crushing and packing effect and the great mobility of the breaker ring makes it highly self cleaning.



AVAILABLE AS STEEL CAST

## Star rings

450/500 mm & 550/600 mm  
Often chosen, when the roller, besides doing the normal roller-jobs, is also used for soil packing and seedbed preparation. In light soil types, the surface is left slightly packed and uneven, which prevents drifting soil. In sticky soil types, the rings' self cleaning effect is of great importance. The Star ring furthermore has a great draining effect on grass fields as the points make little holes in the field.



AVAILABLE AS STEEL CAST

## Cam rings

550 mm  
The Cam ring is most efficient in very light soil types like loose and sandy mould due to the fact that it divides the soil into fine particles and packs it, leaving a porous surface with little clods, which help prevent soil drifting.



## Crosskill rings

485/530 mm & 550/600 mm  
Crosskill rings are often used in light and medium-heavy soil types. The rings crush clods and leave the surface slightly crumbled, which prevents soil drifting. These rings are self cleaning, which only increases the effect of the rings.



## 2D Corrugated rings


500, 550 & 600 mm - 8 / 9 / 10 spokes  
2D corrugated rings create a level surface completely free of stones, which is of great importance when seeding particular types of crop. It is often used for consolidating germinated seeds as the rounded design is gentle with the plants.



AVAILABLE AS STEEL CAST

## Contour Flexing

The Vip-Roller wings are connected to the centre section so they can pivot under control to follow the contours of the field.

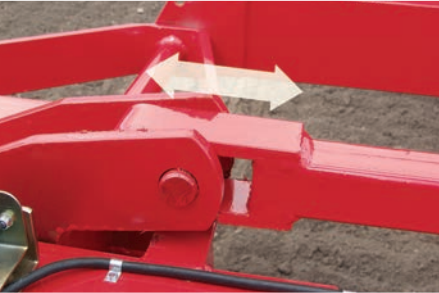

## Simple Locking, Safe Transport

The Vip design supports the side section horizontally in a positive locking cradle, which is safe during transport and storage.



## Drawbar Height Adjustment




The drawbar height is easily adjustable with a simple stop bolt.

Rings are mounted on 60mm axles for strength and long life. The axles run on 4 bolt bearings, protected inside the U profile steel.



## Fast and Safe Folding



2,45 m  
Max.



## Simple Design

This simple design means optimum performance, even with a tractor driver who has aerege skills



## The VIP Finish

