



# COMBI-TILLER PTO

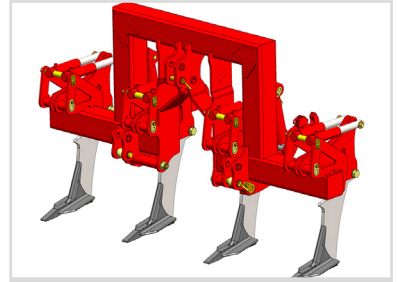

4.00 m Combi-Tiller PTO with 5 tines.

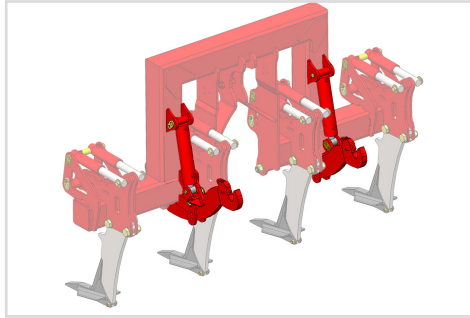

Combi-Tiller PTO, hydr.

- Hydraulic depth regulation.
- Solid frame construction, 180x180x8 mm sectional tubes.
- Max. weight of mounted machine after the Combi-Tiller PTO: 4 tonnes.
- Frame clearance: 580 – 605 mm.
- Max. working depth: 400 mm.
- Length from coupling point to coupling point (centre): 810 mm.
- Three-point linkage in front: cat. 3 pins and cat. 2 distance.
- Lift with cat. 3 snap-couplings and cat. 3 distance

## MACHINES

### COMBI-TILLER PTO WITH TUNNEL FOR THROUGH POWER TAKE-OFF SHAFT

| Work Width, m | Stone Protection       | No. of Tines | Row Spacing, cm | Power Req., HP | Weight, kg | Item Number |
|---------------|------------------------|--------------|-----------------|----------------|------------|-------------|
| 2.50          | Shear bolt             | 4            | 57.5            | 100            | 560        | 64514-01    |
| 2.50          | Hydraulic auto release | 4            | 57.5            | 100            | 690        | 64514-02    |
| 3.00          | Shear bolt             | 4            | 75.0            | 100            | 620        | 64514-05    |
| 3.00          | Hydraulic auto release | 4            | 75.0            | 100            | 750        | 64514-06    |
| 3.00          | Shear bolt             | 6            | 50.0            | 150            | 690        | 64514-07    |
| 3.00          | Hydraulic auto release | 6            | 50.0            | 150            | 820        | 64514-08    |
| 3.50          | Shear bolt             | 6            | 58.3            | 150            | 760        | 64514-10    |
| 3.50          | Hydraulic auto release | 6            | 58.3            | 150            | 930        | 64514-11    |
| 4.00          | Shear bolt             | 6            | 66.6            | 150            | 820        | 64514-15    |
| 4.00          | Hydraulic auto release | 6            | 66.6            | 150            | 990        | 64514-16    |
| 4.00          | Shear bolt             | 8            | 50.0            | 200            | 890        | 64514-17    |
| 4.00          | Hydraulic auto release | 8            | 50.0            | 200            | 1,080      | 64514-18    |

## STANDARD EQUIPMENT

- Pins and locking pins.
- Supporting leg.
- Point with 200 mm wing shares mounted with 25 wide tine.
- Top link.

## EXTRA EQUIPMENT

| Description                                                                                                                                                                                             | Item Number  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| LED lights with wire and socket                                                                                                                                                                         | 64509-01     |
| Set of reflective warning boards (2 pieces)                                                                                                                                                             | 67055-74     |
| Square Tube Roller incl. frame - for retrofitting on 2.50 m Combi-Tiller PTO                                                                                                                            | 64514-20     |
| Square Tube Roller incl. frame - for retrofitting on 3.00 m Combi-Tiller PTO                                                                                                                            | 64514-21     |
| Square Tube Roller incl. frame - for retrofitting on 3.50 m Combi-Tiller PTO                                                                                                                            | 64514-22     |
| Square Tube Roller incl. frame - for retrofitting on 4.00 m Combi-Tiller PTO                                                                                                                            | 64514-23     |
| Point with 120 mm wing shares (Price reduction per tine)                                                                                                                                                | 645000043A   |
| Points 120 mm with hard metal plate (Additional price per tine)                                                                                                                                         | 645000043TA  |
| Point with 350 mm wing shares (Additional price per tine)                                                                                                                                               | 645000063A   |
| Points 200 mm with hard metal plate (Additional price per tine)                                                                                                                                         | 645000044TA  |
| Points with 200 mm wing shares, Longlife, with hard metal (Additional price per tine)                                                                                                                   | 645000044HDA |
| Easy-Draft kit. 15 mm tine w/120 mm wear point w/hard metal plate. Max working depth: 300 mm (Additional price per tine)                                                                                | 64511-15     |
| Easy-Draft kit. 15 mm tine w/120 mm wear point w/hard metal plate. Max working depth: 300 mm (Retrofitting per tine)                                                                                    | 64511-18     |
| 120 mm wear point for Easy-Draft, with hard metal plate in center + wings (Additional price per tine)                                                                                                   | 645000056TA  |
| 200 mm wear point for Easy-Draft, with hard metal plate in center (Additional price per tine)                                                                                                           | 645000054A   |
| 200 mm wear point for Easy-Draft, with hard metal plate in center + wings (Additional price per tine)                                                                                                   | 645000054TA  |
| Tine reinforcement, hard metal 60x25x15 mm incl. factory fitting on new tine. Recommended when tilling > 350 mm. <b>Omittable for item numbers 645000044T / 645000043T.</b> (Additional price per tine) | 645000085    |
| Tine reinforcement, hard metal 60x15x15 mm incl. factory-mounting on new tine. <b>Only applied for Easy-Draft</b> (Additional price per tine)                                                           | 645000083    |
| Cat. 3 for three-point mounting (1010 mm middle - middle)                                                                                                                                               | 64514-25     |

<sup>1\*</sup> Only relevant for Combi-Tiller PTO with hydr. auto-release system