

Extra Equipment

Pivot Flex Drawbar

The pivoting drawbar relieves the tractor's lift. Small turns can be made without raising the harrow.

Applicable for Kulti-Dan models up to 5.20 m.




Flexible Drawbar

The flex drawbar on the Kulti-Dan enables half-trailing while maintaining the advantages of the lift-mounted harrow. Disengagement and engagement is done from the driver's seat.



LED Lights

All models can be equipped with LED lighting. On a Kulti-Dan, the LED light is placed on a bracket, as shown in the picture. The bracket can have different lengths depending on which equipment is on your Kulti-Dan.

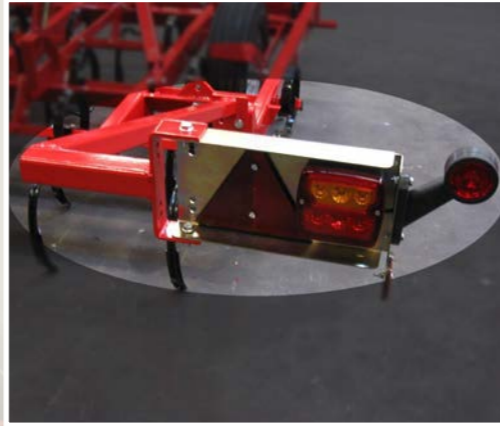

HE-VA

Kulti-Dan

Versatile lift-mounted seedbed harrow
for all types of soil

Technical Specifications



2.20 - 7.00 m



2.20 - 3.00 m



25 - 110 hp



370 - 1,013 kg



22 - 70 pcs.

Work Width, m	Type	Transport Width, m	Number of Tines	Number of Tines per Section	Power Requirement, hp	Weight, kg
2.20	Rigid	2.20	22	22	25 - 35	370
2.80	Rigid	2.80	28	28	35 - 45	423
3.40	Manual folding	2.40	34	6 + 22 + 6	45 - 55	556
4.00	Manual folding	3.00	40	6 + 28 + 6	50 - 60	609
4.60	Hydr. foldable	2.40	46	12 + 22 + 12	60 - 75	761
5.20	Hydr. foldable	3.00	52	12 + 28 + 12	70 - 90	819
5.80	Hydr. foldable	2.40	58	18 + 22 + 18	80 - 90	897
6.40	Hydr. foldable	3.00	64	18 + 28 + 18	80 - 100	955
7.00	Hydr. foldable	3.00	70	21 + 28 + 21	90 - 110	1,013



Tel.: +45 97 72 42 88
E-mail: info@he-va.com

Web: www.he-va.com

N.A. Christensensvej 34
DK-7900 Nykøbing Mors

Your HE-VA dealer

HE-VA

HE-VA reserves the right to make design and construction changes without notice

HE-VA

Simple and efficient cultivation on all soil types

Kulti-Dan is a flexible lift-mounted seedbed harrow that with the wide range of extra equipment can be adapted for any farm, soil type and tractor.

The large depth wheels carry the harrow on light soil, while a high weight ensures a correct harrow depth on even the heaviest soil.



Harrow Tines

As standard, the Kulti-Dan has 10 x 32 mm tines mounted on 4 rows with a row distance of 40 cm. The average row spacing is 10 cm (optionally 8 cm). In addition, 12x32 mm tines can be fitted.

The angle of tines can quickly and easily be adjusted in 4 different positions by using the adjusting handle, depending on the soil type and harrowing task.



Large Depth Wheel

6.00 x 12 wheels keep the depth very accurate. The wheels are spindle-adjusted and equipped with a depth setting scale. Adjustable wheel scrapers guarantee an unproblematic operation.



Quick Coupling

Kulti-Dan is equipped with a quick coupling, which makes connecting and disconnecting very easy.

Support legs make it easy to park the harrow.



Transport Lock

On models with hydraulic folding, the automatic transport lock secures both side sections.



Extra Equipment

HE-VA's range of extra equipment ensures that the Kulti-Dan is optimally equipped for any farm and soil type.

Levelling Bar

The spring-loaded levelling bar is effective for levelling the field and crushing clods before the soil is cultivated. Adjustments are made quickly without the use of tools. Powerful springs secure the levelling bar against overload when encountering rocks.



Rotor Crumbler

The rotor crumbler presses the cultivated soil so that the moisture is preserved and larger clods are crushed. The pressure on the rollers is adjusted via the springs.

Available both as a single and as a double rotor crumbler.



Combi-After-Harrow

The combi-after-harrow is a combination of a long finger after-harrow and a rotor crumbler. A uniform as well as a fine and even seed bed on medium-heavy soil is achieved with the combi-after-harrow, as it levels and presses the soil simultaneously.



Long Finger After-Harrow

The long finger after-harrow effectively evens out the tine tracks. Both depth and angle settings can be easily changed on the harrow so that the required work intensity can be achieved.

