
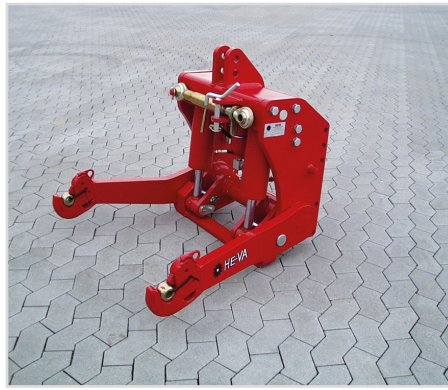


# MULTI-PURPOSE LIFTS 40.01 AND 55.01

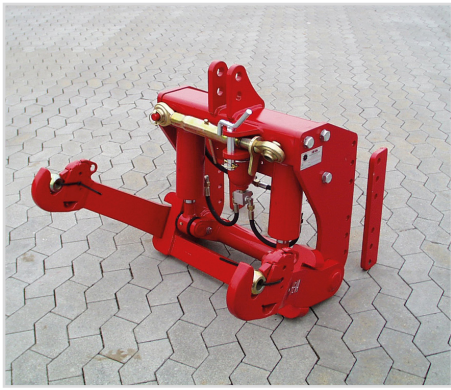

- Multi-Purpose Lifts with 4,000 kg and 5,500 kg lifting capacity with 190 bar.
- Ideal for many functions.
- Constructed to last for big forces as twisting and sudden pressures.

Type / Designation	Weight, kg	Item Number
40.01 without bolt brackets. For max. 12 tonnes slurry trailer tankers / max. 4 m injectors.	190	66702-00
55.01 without bolt brackets. For max. 15 tonnes slurry trailer tankers / max. 6 m injectors.	250	66802-00
55.01 without bolt brackets. Strengthened model f/mounting on all sizes of slurry trailer tanks / injectors.	275	66803-00

## STANDARD EQUIPMENT

- Double acting hydr. with air filter on lowering side.
- Cat. 2, DS/ISO 8759/1/2, 825 mm between the lift arms' balls.
- Cleaned and painted with a two-component primer and finally painted in red colour – two-component.
- Can, by request, be painted in other colours without additional costs.
- Hydr. hoses between cylinder in a 3/8" coupling.
- Quick-coupling for lift arms, cat. 3 with Ø28 mm balls, cat. 3/2.
- Top link M36 and Ø25 mm pin with parking device for the lift arms' balls.
- Parking device for top link.
- The model for slurry trailer tanks is strengthened with top links between the lifting arms for greater strength when driving with big tanker with wide implement. This model has mechanical locking chain in top position (for drip hose boom).

## EXTRA EQUIPMENT

Type / Designation	Weight, kg	Item Number
Bolt brackets incl. bolts for 40.01	6	66702-01
Bolt brackets incl. bolts for 55.01	10,2	66802-01
Hydraulic hoses 5,5 m with quick coupling - male (per unit)	4	690201302
Shock absorber kit incl. hoses and fittings, mounted for 40.01	4	66785-00
Shock absorber kit incl. hoses and fittings, mounted for 55.01	4	66885-00
Spring suspension kit incl. hoses and fittings, mounted for 40.01	16	66790-00
Spring suspension kit incl. hoses and fittings, mounted for 55.01	16	66890-00